CSK 060 Touch-Safe PTC Heater 10 & 20W



- **Low surface temperature**
- **Compact size**
- **Wide voltage range**
- **Double insulated protection**
- **DIN rail mountable**

The CSK 060 is a touch-safe heater for use in enclosures. The design of the heater utilizes natural convection which results in a circulating current of warm air. The surface temperatures on the accessible side surfaces of the housing are minimized as a result of the heater design.

Technical Data

Heating capacity	see table
Heating element	PTC resistor - temperature limiting
Surface temperature	< 176°F (80°C), except upper protective grill
Connection	4-pole terminal AWG 14 max (2.5mm²), torque 0.8Nm max.
Mounting	clip for 35mm DIN rail, EN 60 715
Housing	plastic, UL 94V-0, black
Mounting position	vertical
Operating / storage temperature	-49 to +158°F (-45 to +70°C)
Protection class	II (double insulated)
Protection type	IP20
Approvals	UL File No. E150057, VDE
Note	other voltages available upon request



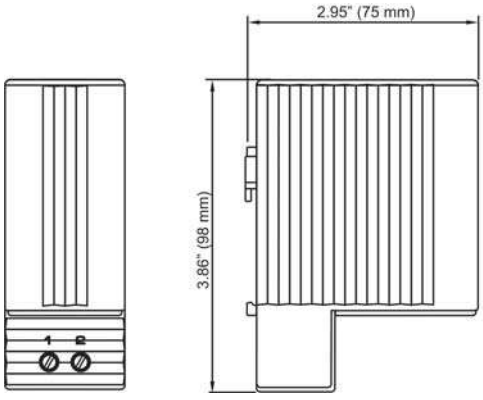



Wiring example

Part No.	Heating capacity[1]	Operating voltage[2]	Max. current (inrush)	Dimensions	Weight (approx.)
06030.0-00	20W	AC/DC 120-240V	2.5A	3.86 x 2.95 x 1.5" (98 x 75 x 38mm)	6.1 oz. (170g)
06040.0-00	10W	AC/DC 120-240V	1.0A	3.86 x 2.95 x 1.5" (98 x 75 x 38mm)	5.0 oz. (140g)
06040.1-00	10W	AC/DC 12-30V	8A	3.86 x 2.95 x 1.5" (98 x 75 x 38mm)	5.0 oz. (140g)

[1] at 68°F (20°C) ambient temperature

[2] operating high voltage heaters below AC/DC 140V reduces heating performance by approx. 10% (min. 110V, max 265V).

Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/ buyer in its final application.

STEGO, Inc. · 1395 South Marietta Parkway · Building 800 · Marietta, GA 30067 · Tel: (770) 984-0858 · Fax: (770) 984-0615
Toll free: 1-888-783-4611 (US & Canada only) · www.stegousa.com