HR1XS110S

Socket for relay, 110...125VAC/DC, spring terminals



Product designation		SOCKET
Product type designation		HR1X
Contact characteristics		
Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage Uimp	kV	4
Coil characteristics		
Relay control voltage + socket	V	110… 125VAC/DC
Mechanical features		
Fixing		On 35mm DIN rail

Dimensions

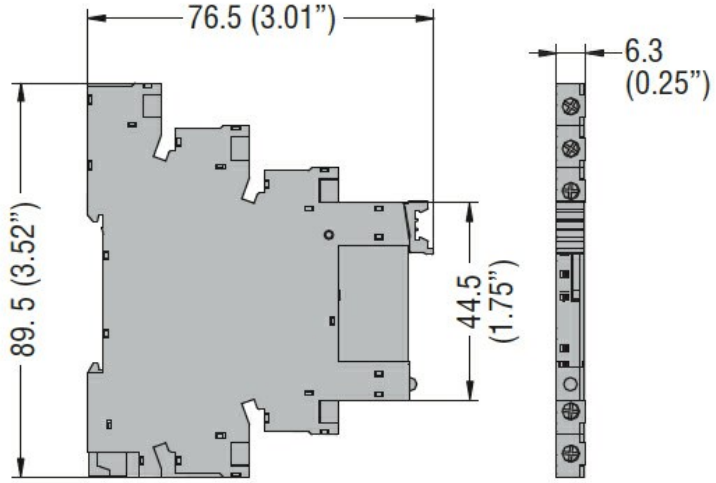

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

HR1XS110S

Socket for relay, 110...125VAC/DC, spring terminals

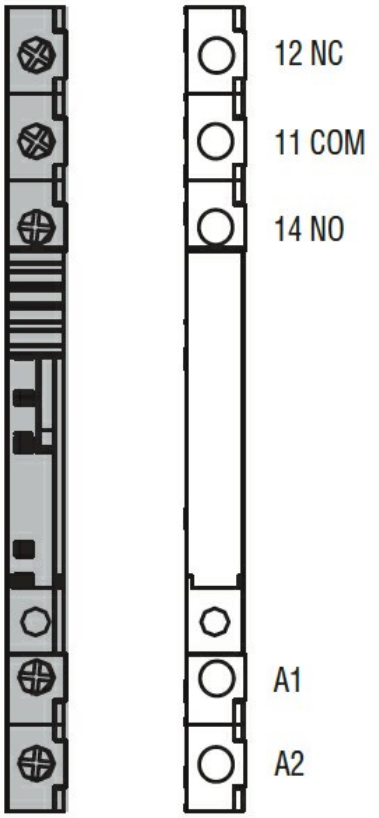

Certifications and compliance

Compliance

	IEC/EN 61810

Certificates

	CSA
	cURus
	EAC

ETIM classification

ETIM 8.0	EC001456 - Relay socket

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding