Datenblatt - Fiche technique - Data sheet


21.15.2514



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, rot, 1,5 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, rouge, 1,5 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, red, 1.5 m

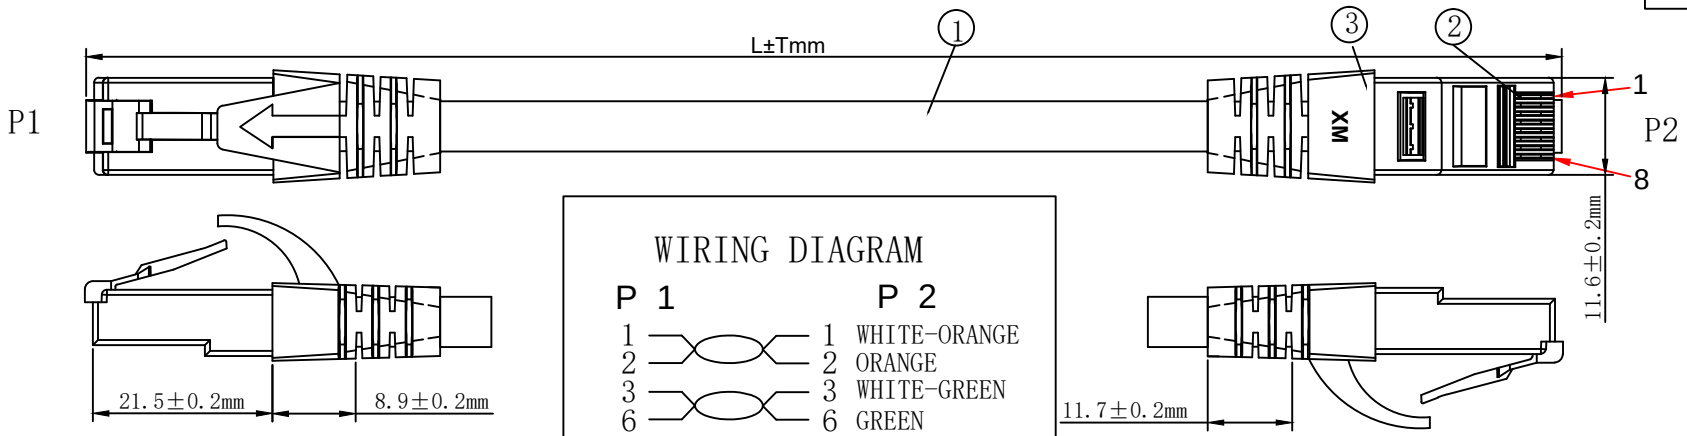

WIRING DIAGRAM

P 1		P 2
1		1 WHITE-ORANGE
2		2 ORANGE
3		3 WHITE-GREEN
6		6 GREEN
4		4 BLUE
5		5 WHITE-BLUE
7		7 WHITE-BROWN
8		8 BROWN

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:50mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Red	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u″,Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	

COLOUR:Red(PANTONE:199C)		
ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2941	300mm	±10mm
21.15.2510	500mm	±15mm
21.15.2511	1000mm	±30mm
21.15.2514	1500mm	±45mm
21.15.2512	2000mm	±60mm
21.15.2513	3000mm	±90mm
21.15.2515	5000mm	±150mm
21.15.2516	7500mm	±210mm
21.15.2517	10000mm	±300mm
21.15.2518	15000mm	±450mm
21.15.2519	20000mm	±600mm

ITEM NO.	21.15.2941	21.15.2510	21.15.2511	21.15.2512	21.15.2513
21.15.2514	21.15.2515	21.15.2516	21.15.2517	21.15.2518	21.15.2519
DESC.	ROLINE UTP PatchCord CAT.6,LSOH,Comp.Level,red				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

SECOMP