www.flex-tools.com

this is proformance FLEX

SHE 16 18.0-EC C

Cordless metal shears 18 V

Order no. 531583

GTIN 4030293254237



- Maximum curve mobility and convenient cutting of tight radii from 15 mm
- Burr-free cutting of metal sheets and blade spacing flexibly adjustable to different sheet thicknesses
- Extremely streamlined handle section with soft-grip inlays for perfect handling
- Brushless motor with greater efficiency and a longer service life
- Electronics: Speed preselection in 4 steps, CDC constant electronics, soft start, overload protection, restart lock, temperature monitoring
- Anti-Kickback - this shuts down the motor on the tool being blocked
- Maximum work safety when cutting thanks to large hand guard
- 4 HSS reversible cutters: the cutters can be reversed, allowing them to be used four times
- On/off switch with lock and protection
- LED battery capacity display
- FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger

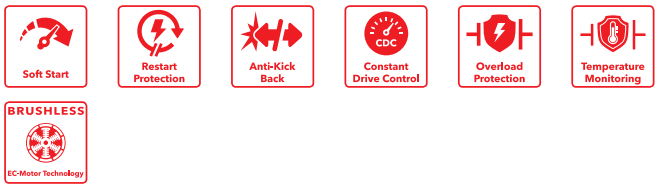

Technical data

Orbit rate, no load	950-2050 1 rpm
Max. metal sheet thickness, steel 400 N/mm2	1.6 mm
Max. metal sheet thickness, steel 600 N/mm2	1.2 mm
Max. metal sheet thickness, steel/stainless steel 800 N/mm2	1.0
Max. metal sheet thickness, aluminium 250 N/mm2	2.0
Smallest radius	16 mm
Min. starting hole diameter	27 mm
Diameter of smallest cuttable hole	50 mm
Working speed	5-9 m/min
Sound pressure level in acc. with EN 60745	90 dB(A)
Vibration in acc. with EN 60745	4.6 m/s^2
Battery voltage	18.0 V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Weight without battery pack	1.5 kg

Standard equipment

1 Fixing & adjustment set (532171)