Mounting accessories
BTS-DSU35-EB1

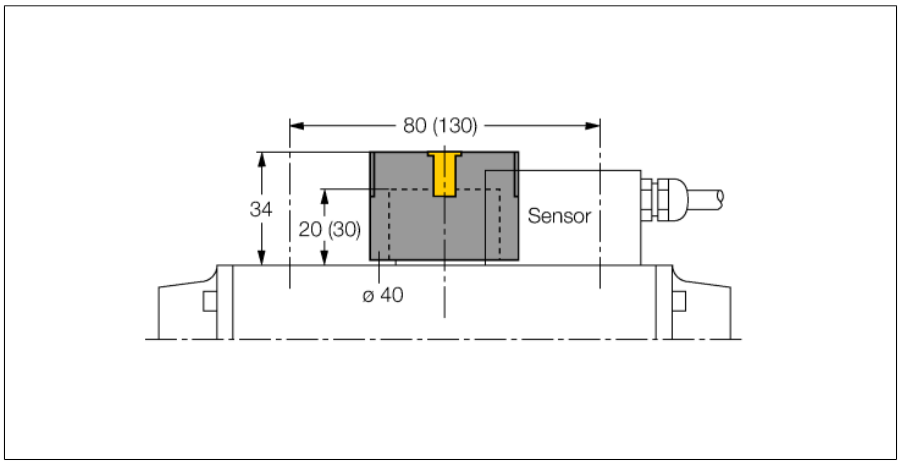

- **Actuation kit (puck)**
- **End position damped**
- **For clockwise or counter-clockwise rotating drives**
- **Displays rotatable by 90°**
- **Hole pattern on flange surface 30 x 80 mm (30 x 130 mm); connection shaft (shaft peg) height 20 (30) mm / Ø max. 30 mm**
- **Slide ring, max. Ø 34 mm**

Type code	BTS-DSU35-EB1
Ident no.	6900225
Design	accessories for dual sensors, Ni4-DSU35…
Housing material	plastic, PP
Tightening torque	1.5 Nm

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.



Edition • 2014-05-16T18:27:01+02:00

Hans Turck GmbH & Co.KG ● D-45472 Mülheim an der Ruhr ● Witzlebenstraße 7 ● Tel. 0208 4952-0 ● Fax 0208 4952-264 ● more@turck.com ● www.turck.com