Cube67 Diagnostic Gateway

Diagnosis made easy, Simple system overview

Cube67
Diagnostic gateway
Ethernet TCP/IP

Link to Product

Illustration


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 12/19


Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

MURR ELEKTRONIK
stay connected



AWARDS
GERMAN INNOVATION AWARD '19 SPECIAL
INDUSTRIE PREIS 2018

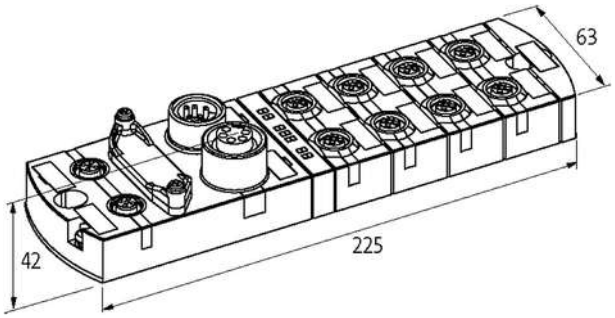

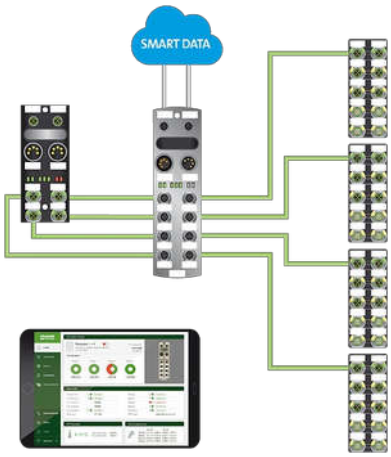

Product may differ from Image

Approvals

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 12/19

MURR ELEKTRONIK
stay connected

c UL us Listed

Connections	
Fieldbus	2× M12 (female), D-coded
Internal system connection	8× M12 (female), 6-pole
Supply	2× 7/8" (male/female), 5-pole
Module supply	
Operating voltage	24 V DC ±25%
Current consumption	max. 200 mA
General data	
Protection	IP67
Mounting method	2-hole screw mounting
Dimensions H×W×D	42×63×225 mm
Temperature range	0...+55 °C (storage temperature -25...+70 °C)
Cube system	
Cube67 system connection	yes
Protection	
Reverse polarity protection module	yes
Over voltage protection	yes
Commercial data	
country of origin	DE
customs tariff number	85389099
EAN	4048879652216
eClass	27242608
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 12/19