

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| E | ECN 9382: UPDATE OVERMOLD ON A FEMALE END | 08/30/2018 | SLI |

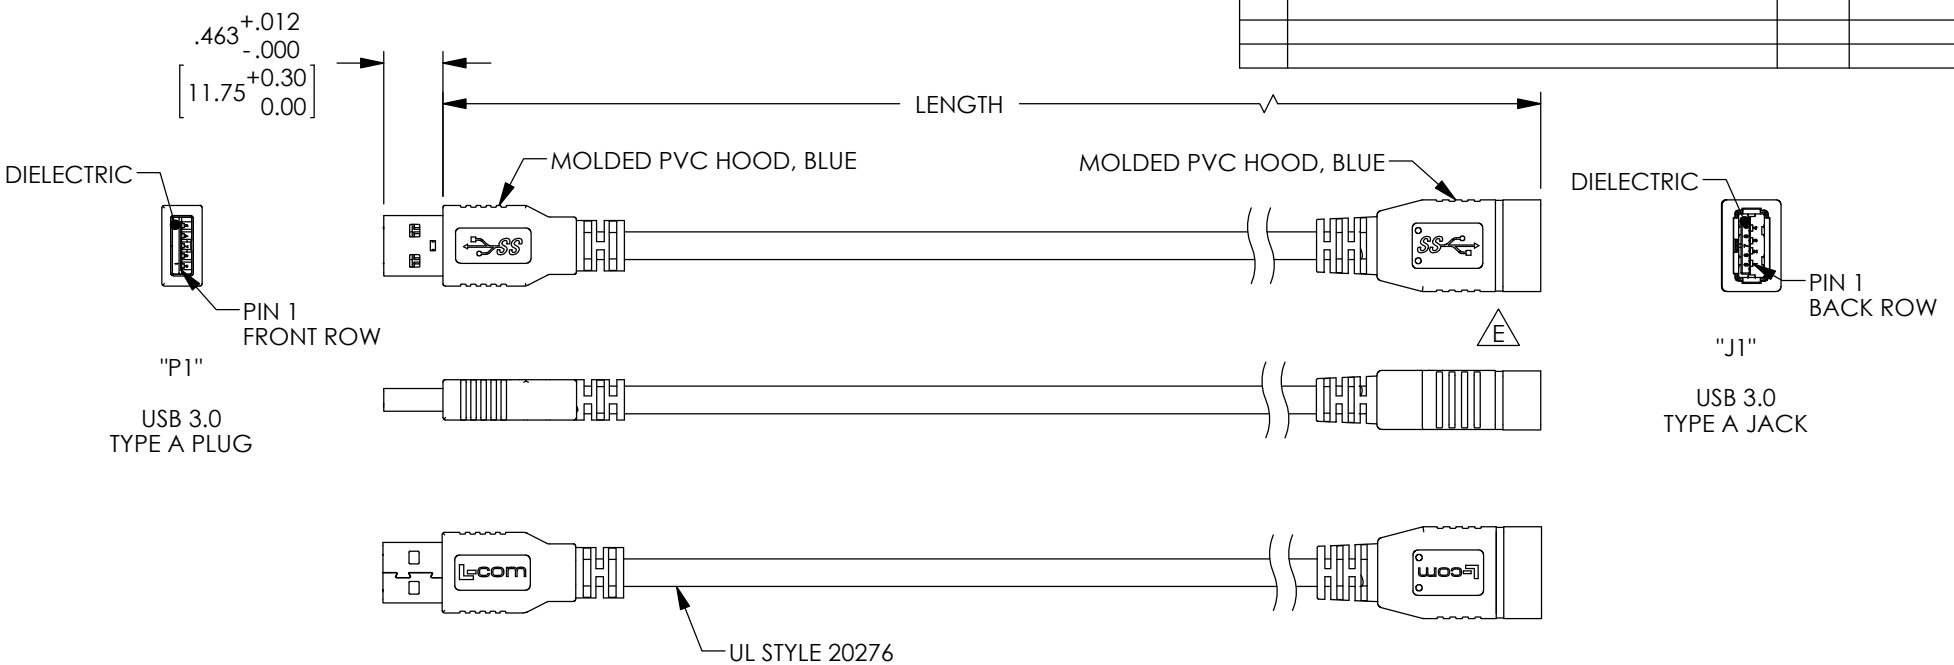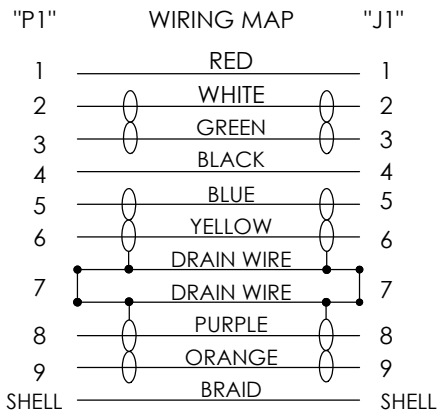


| MODEL NUMBER | LENGTH METERS [FEET] |
|---|---|
| CAU3AX-03M | 0.3 [.98] |
| CAU3AX-05M | 0.5 [1.64] |
| CAU3AX-075M | 0.75 [2.46] |
| CAU3AX-1M | 1.0 [3.28] |
| CAU3AX-2M | 2.0 [6.56] |
| CAU3AX-3M | 3.0 [9.84] |

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

| APPROVALS | | DATE |
|---|---|---|
| DRAWN BY | D. PARHAM | 06/25/2010 |
| CHECKED BY | DFRISIELLO | 06/25/2010 |
| APPROVED BY | S. SMITH | 06/29/2010 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CA, USB 3.0 TYPE A-M TO TYPE A-F

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | CAU3AX | E |

SCALE: NONE | CAD FILE: CAU3AX.SLDDRW | SHEET 1 OF 1