
P5X193E110


MOTOR OPERATOR FOR REMOTE OPERATION FOR P5ME…0800, 110VAC/DC



Product designation		Motor operator
Product type designation		P5X193E110
Description		Motor operator for remote operation.
Accessories for		Accessories for IEC-compliant MCCBs
Operational characteristics		
Rated operational voltage	V	110VAC/DC
Rated current (In)	A	≤2A
Mechanical operation	cycles/h	20
Average closing time	ms	700
Average opening time	ms	420
Power consumption	W	35
Mechanical features		
Weight	g	3500
Operations		
Mechanical life	cycles	10000
Dimensions		

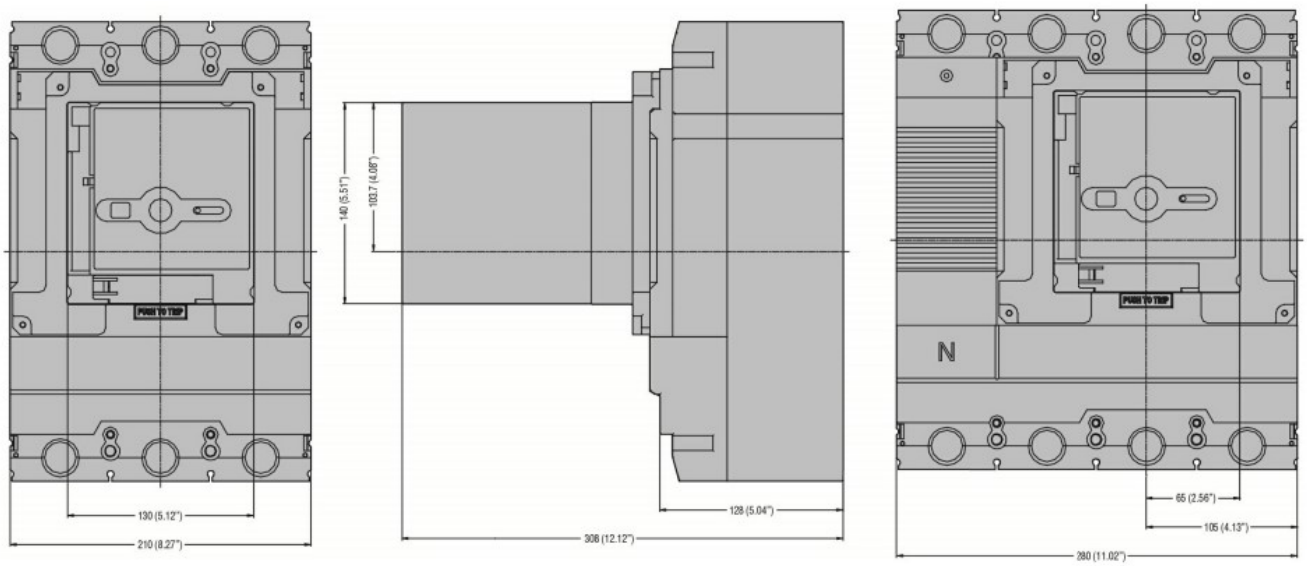

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

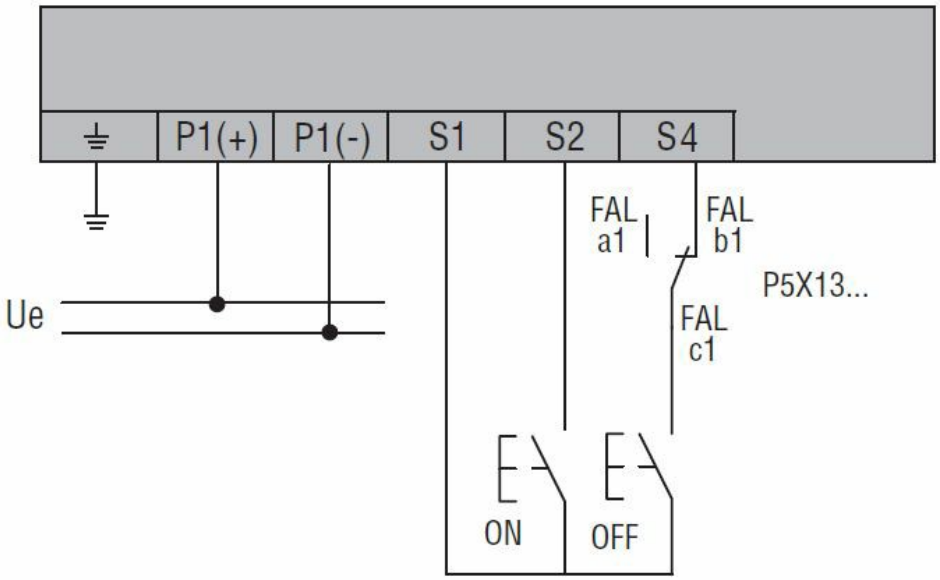

Note: Connect an NC contact of an alarm switch contact block in series with S4 to prevent remote closing of the MCCB after tripping due to overcurrent or short circuit.

Wiring diagrams

Certifications and compliance

Certificates

ETIM classification

EC000066 - Power contactor, AC switching

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding