MURR ELEKTRONIK
stay connected

M8 MALE FLANGE PLUG FRONT MOUNT

PP wires 4x0.25 0.5m

Link to Product

Illustration

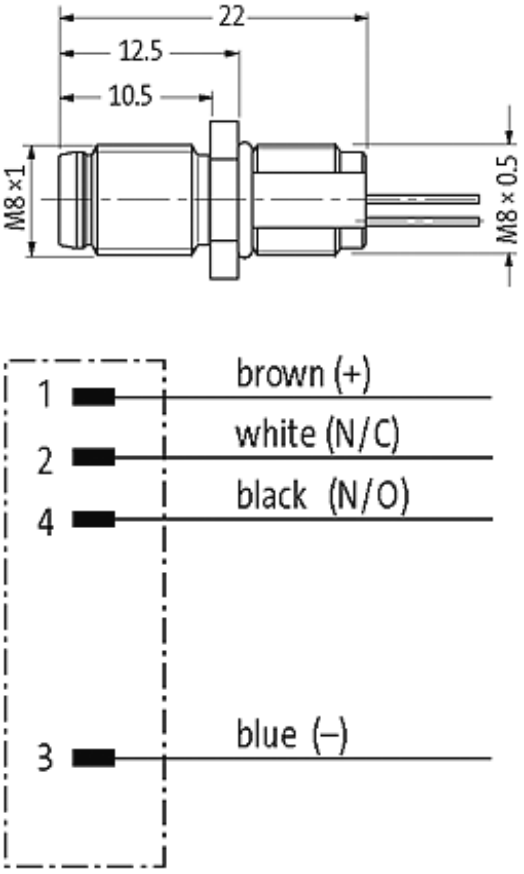

Product may differ from Image

Form

	08562

Technical Data

Operating voltage	max. 30 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M8 × 1 mm (recommended torque 0.4 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

Cables

No./diameter of wires	4 × 0.25 mm²
Wire isolation	PP (br, wh, bl, bk)
Outer diameter	approx. 1.25 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14

stay connected

General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85444290
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 11/14