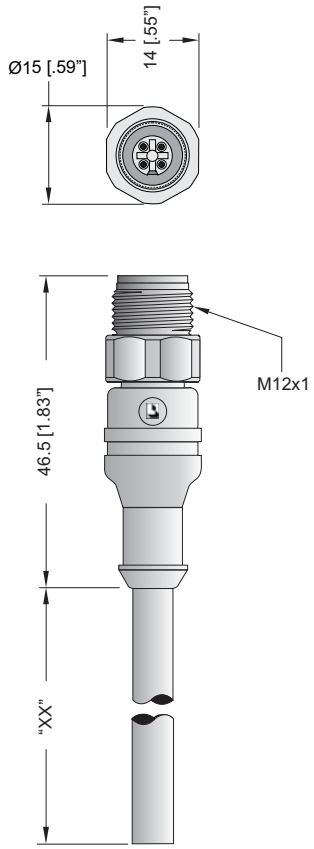
## PRST...

MICRO (M12) Single-Ended Cordset
4 Pole, 0.25mm², Male, PVC Cable with Stainless Steel Coupling Nut







### Technical Data

| | |
|---|---|
| **Materials** | |
| Molded Body | PVC, Orange |
| Coupling Nut | Stainless Steel |
| Contacts | Brass, gold over nickel plated |
| Insert | PVC, Orange |
| **Electrical** | |
| Current Rating | 4A |
| Voltage Rating | 250V |
| **Mechanical** | |
| Temperature | -25°C to 70°C |
| Protection | IP 69 K |
| **Cable Specifications** | |
| Cable Jacket | PVC, orange |
| Overall Diameter | 5.0mm |
| Conductor | 0.25mm², stranded |
| **Certifications** | |

### Features & Benefits

- 316L/V4A stainless steel coupling nut
- PVC inserts, molded body and cable jacket
- IP 69 K rated

### Pin Assignments




1 - Brown
2 - White
3 - Blue
4 - Black

| Part Number | Poles |
|---|---|
| PRST 4-07/5M | |
| PRST 4-07/10M | 4 |
| PRST 4-07/25M | |

© Copyright 2004. All rights reserved. Printed in the United States Of America AC FB T11 0604

Lumberg, Inc. • 14121 Justice Road • Midlothian, VA 23113-USA • Tel: 804.379.2010 • Fax: 804.379.3232 • info@lumbergusa.com