rotronic

Datenblatt - Fiche technique - Data sheet

11.04.5595




ROLINE Monitorkabel DVI, ST-ST, (24+1) dual link, 10m

ROLINE Câble DVI, M/M, (24+1) dual link, 10,0m

ROLINE Monitor Cable, DVI M – DVI M, (24+1) dual link, 10 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR # 071205-4 ADD LENGTH	12/05/07'
2*2	C	ECR # 080509-7 EDIT PACKING,ADD BAR CODE	05/09/08'

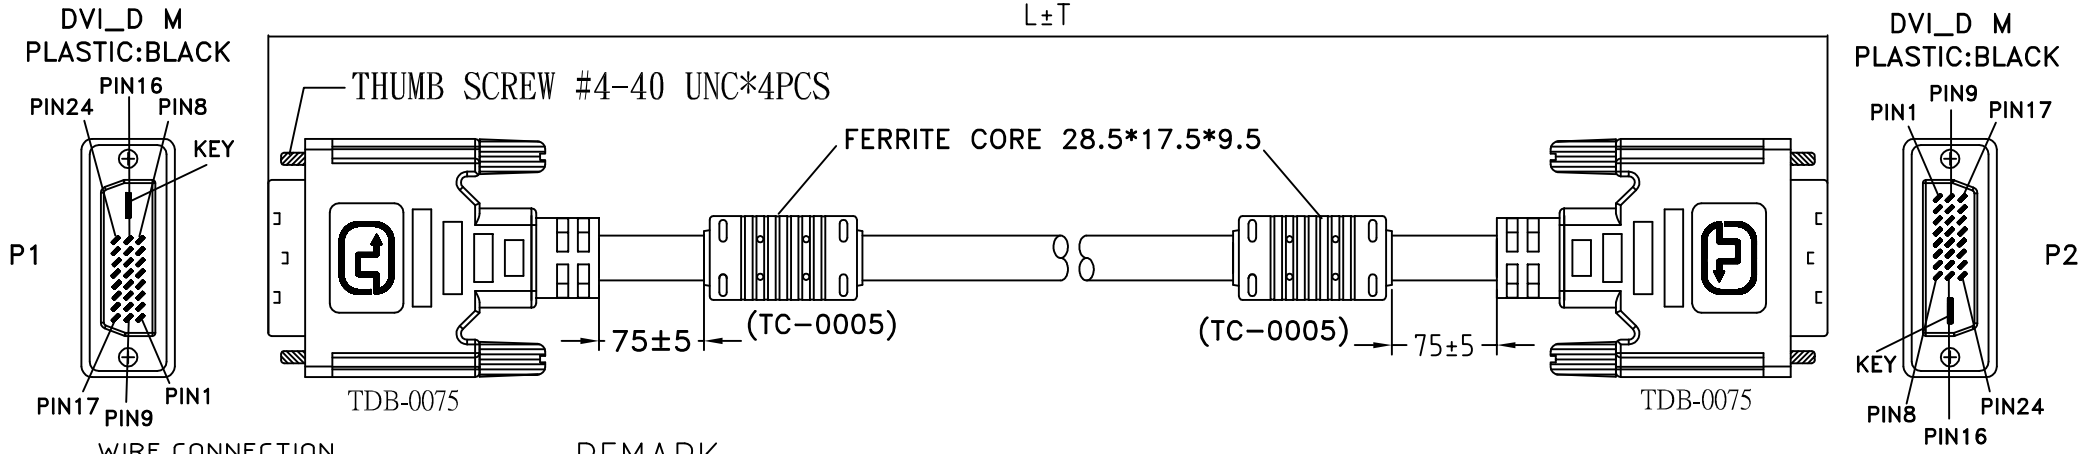

WIRE CONNECTION

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

REMARK:

1. CABLE:UL-20276 [28AWG(7/0.127)×1P+DRAIN WIRE+AL/MY+MYLAR]×7C+28AWG(7/0.127)×1P+ 28AWG(7/0.127)×3C+AL/MYLAR+BRAID SHIELDS(85%)T.C PVC JACKET, OD: 8.6±0.15mm, COLOR:BLACK(NK-K01).
2. CONNECTOR:
   P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
3. SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
4. HOOD:
   P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
5. FERRITE CORE: (28.5×17.5×9.5) x 2
6. TEST REQUEST:
   (1) 100% SHORT OPEN & MIS WIRE TEST.
   (2) CONTACT RESISITANCE 3 OHMS MAX.
   (3) INSULATION RESISITANCE 10M OHMS MIN.
   (4) HI-POT VOLTAGE: 300V DC.
7. PACKING:EACH PC / POLY BAG + P/N LABEL

△2

△1 △2

DWG NO.	P / N	L (m/m)	T (m/m)	PCS/CTN	BAR CODE NO.
200-0839-2	11.99.5598	15000	150	4	7611990175253
200-0839-1	11.04.5595	10000	100	10	7611990160938

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw FANNIE 05/09/08'

Check

Engr

Rotronic Co., Ltd.

Title: DVI_D - DVI_D DUAL LINK CABLE

Customer P/N:

App'd | Customer T-RAG

Scale NONE | Units m/m | Third Angle Projection

Dwg No. 200-0839 | REV:C | Sheet 1/1