# 11BGR0901A048

REVERSING CONTACTOR ASSEMBLY, AC COIL, EXTERNAL INTERLOCK WITH POWER AND AUXILIARY WIRING, 9A AC3 IN AC, 4KW. COIL VOLTAGE 48VAC 50/60HZ



| | | | |
|---|---|---|---|
| Product designation | | | Reversing contactor |
| Product type designation | | | BGR09 |
| **Electrical features** | | | |
| Maximum operating current (≤440V) | | A | 9 |
| **Contact characteristics** | | | |
| Operational current Ie | | | |
| | AC-3 (≤440V ≤55°C) | A | 9 |
| Rated operational power AC-3 (T≤55°C) | | | |
| | 230V | kW | 2.2 |
| | 400V | kW | 4 |
| | 415V | kW | 4.3 |
| | 440V | kW | 4.5 |
| | 500V | kW | 5 |
| | 690V | kW | 5 |
| Built-in auxiliary contacts | | | |
| | NO | | 0 |
| | NC | | 1 |
| **UL technical data** | | | |
| Maximum UL/CSA horsepower ratings single-phase | | | |
| | 110V-120V | HP | 0.5 |
| | 220V-240V | HP | 1.5 |
| Maximum UL/CSA horsepower ratings three-phase, 3-pole | | | |
| | 200V-208V | HP | 2 |
| | 220V-240V | HP | 3 |
| | 440V-480V | HP | 5 |
| | 550V-600V | HP | 5 |
| **Mechanical features** | | | |
| Terminals type | | | Clamp screw |
| Weight | | g | 394 |
| **Dimensions** | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# 11BGR0901A048

REVERSING CONTACTOR ASSEMBLY, AC COIL, EXTERNAL INTERLOCK WITH POWER AND AUXILIARY WIRING, 9A AC3 IN AC, 4KW. COIL VOLTAGE 48VAC 50/60HZ

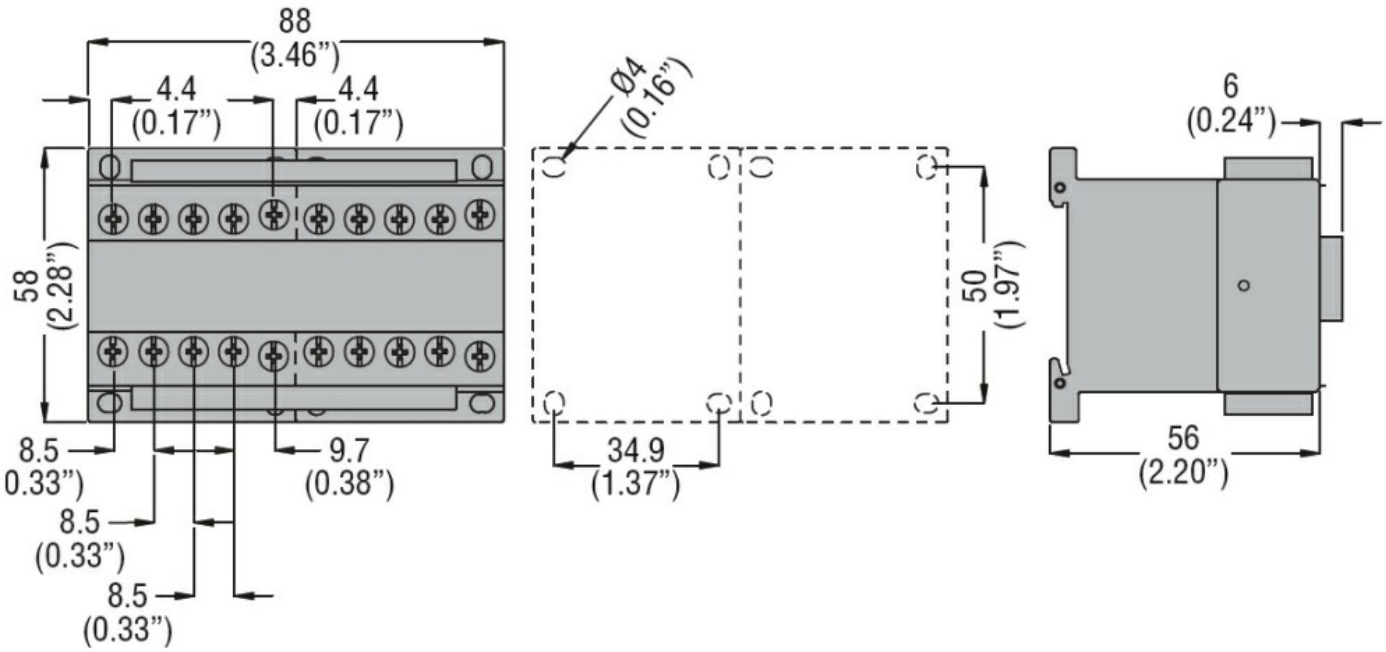


## Wiring diagrams

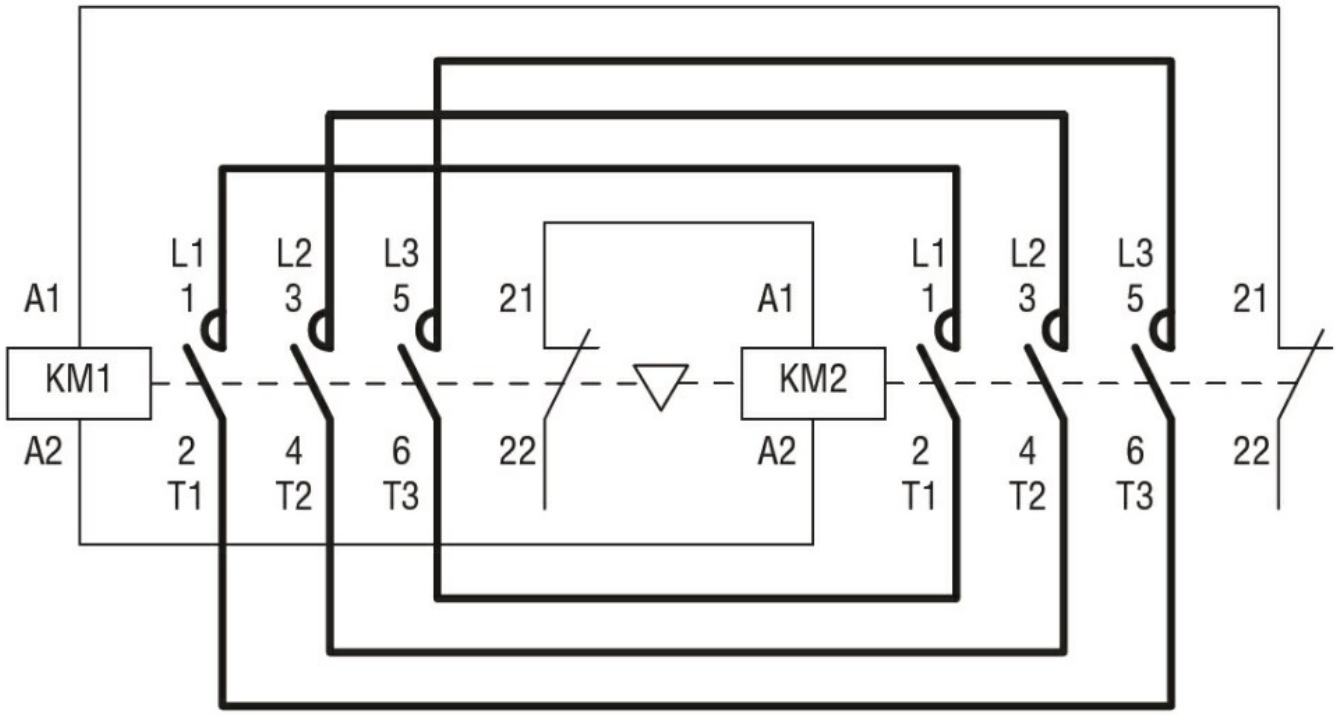


## Certifications and compliance

Compliance

| | |
|---|---|
| | IEC/EN 60947-1 |
| | IEC/EN 60947-4-1 |
| | UL508 CSA C22.2 n° 14 |

Certificates

| | |
|---|---|
| | cULus |

## ETIM classification


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | |
|---|---|
| ETIM 8.0 | EC001037 - Motor starter/Motor starter combination |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding