
PERFORMANCE MADE SMARTER

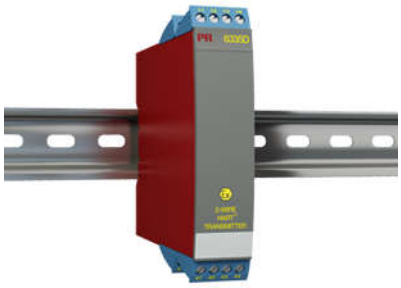

2-wire HART transmitter

6335D

– RTD, TC, Ohm, or mV input
– Extremely high measurement accuracy
– HART 5 protocol
– Can be installed in Ex zone 0
– 1- or 2-channel version

Application

- Linearized temperature measurement with Pt100...Pt1000, Ni100...Ni1000, or TC sensor.
- Difference or average temperature measurement of 2 resistance or TC sensors.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.
- Amplification of a bipolar mV signal to a standard 4...20 mA current signal.
- Connection of up to 15 channels to a digital 2-wire signal with HART communication.


Technical characteristics

- Within a few seconds the user can program PR6335D to measure temperatures within all ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 2-, 3- and 4-wire connection.
- The 6335D has been designed according to strict safety requirements and is therefore suitable for application in SIL 2 installations.
- Continuous check of vital stored data for safety reasons.
- Sensor error detection according to the guidelines in NAMUR NE89.

Mounting / installation

- Mounted vertically or horizontally on a DIN rail. As the devices can be mounted without any distance between neighboring units, up to 84 channels can be mounted per meter.

Applications

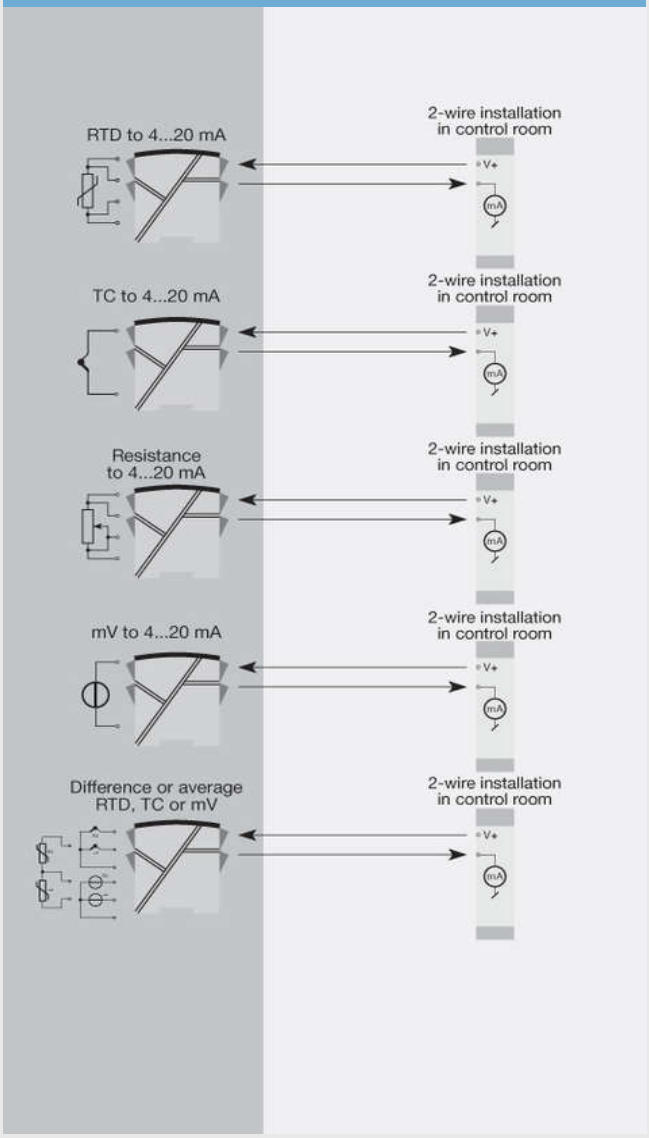

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order:

Type	Galvanic isolation	Channels
6335D	1500 VAC : 2	Single : A Double : B

*NB! Please remember to order CJC connectors type 5910Ex (channel 1) and 5913Ex (channel 2) for TC inputs with an internal CJC.

Environmental Conditions

Operating temperature	-40°C to +85°C
Storage temperature	-40°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20

Mechanical specifications

Dimensions (HxWxD)	109 x 23.5 x 104 mm
Weight (1 / 2 channels)	145 / 185 g
DIN rail type	DIN EN 60715/35 mm
Wire size	0.13...2.08 mm^2 AWG 26...14 stranded wire
Screw terminal torque	0.5 Nm

Common specifications

Supply

Supply voltage	8.0...30 VDC

Isolation voltage

Isolation voltage, test / working	1.5 kVAC / 50 VAC

Response time

Response time (programmable)	1...60 s
Voltage drop	8.0 VDC
Warm-up time	30 s
Programming	Loop Link & HART
Signal / noise ratio	Min. 60 dB
Accuracy	Better than 0.05% of selected range
Signal dynamics, input	22 bit
Signal dynamics, output	16 bit
Effect of supply voltage change	< 0.005% of span / VDC

Input specifications

Common input specifications

Max. offset	50% of selected max. value

RTD input

RTD type	Pt100, Ni100, lin. R
Cable resistance per wire	5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)
Sensor current	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire)	< 0.002 Ω / Ω
Sensor error detection	Yes

Linear resistance input

Linear resistance min....max	0 Ω...7000 Ω

TC input

Thermocouple type	B, E, J, K, L, N, R, S, T, U, W3, W5
Cold junction compensation (CJC)	< ±1.0°C
Sensor error detection	Yes
Sensor error current: When detecting / else	Nom. 33 µA / 0 µA

Voltage input

Measurement range	-800...+800 mV
Min. measurement range (span)	2.5 mV
Input resistance	10 MΩ

Output specifications

Current output

Signal range	4…20 mA
Min. signal range	16 mA
Load (@ current output)	≤ (Vsupply - 8) / 0.023 [Ω]
Load stability	≤ 0.01% of span / 100 Ω
Sensor error indication	Programmable 3.5…23 mA
NAMUR NE43 Upscale/Downscale	23 mA / 3.5 mA

Common output specifications

Updating time	440 ms
of span	= of the presently selected range

Observed authority requirements

EMC	2014/30/EU

Approvals

ATEX 2014/34/EU	KEMA 09ATEX0148
IECEx	KEM 10.0084X
FM	FM17US0013X
CSA	1125003
EAC Ex TR-CU 012/2011	RU C-DK.GB08.V.00410
SIL	Hardware assessed for use in SIL applications