


WISKA COMBI 108



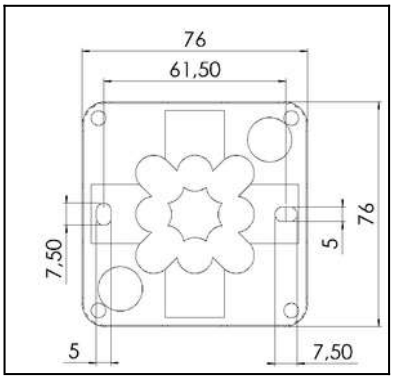

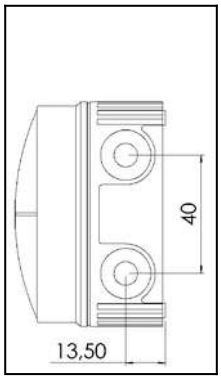

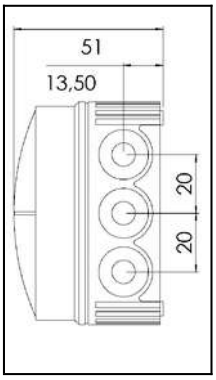

Protection class to EN 60 529:	IP 66
Flame protection:	glow wire test 750° C acc. to EN 60695-2-11
Temperature range:	-5°C up to 60°C
Voltage:	400 V
Material:	Polypropylene, reinforced glass fibre; sealing: thermoplastic elastomere
Terminals/poles:	2,5 mm²
Fixing:	With mounting clip for snap-on fixing or 2 internal openings outside of the sealing area
Equipment:	10 elastic self-sealing membranes for cable entry without mechanical devices at the side and 2 in the base - Colour RAL 7035 light grey - .../S = black - .../W = white - .../DR = grey box with red cover - .../SMB = incl. mounting clip for snap-on fixing
Accessories:	- SMB 108: mounting clip for snap-on fixing, WISKA-No. 60528 - DN 48: screwing sleeves for fixing profile rails, WISKA-No. 60372 - DIN RAIL KIT 108, 308: Rail TS 35 + Fixing material, WISKA-No. 60362

Type	WISKA-No.		mm		L x B x H external/außen mm
COMBI 108/leer	10060522	10/100	3 - 14		76 x 76 x 51
COMBI 108/leer/S	10061999	10/100	3 - 14		76 x 76 x 51
COMBI 108/leer/W	10060622	10/100	3 - 14		76 x 76 x 51
COMBI 108/leer/DR	10060632	10/100	3 - 14		76 x 76 x 51
COMBI 108/leer/SMB	10061974	10/100	3 - 14		76 x 76 x 51
COMBI 108/5	10060523	10/100	3 - 14		76 x 76 x 51
COMBI 108/5/S	10061998	10/100	3 - 14		76 x 76 x 51
COMBI 108/5/W	10060623	10/100	3 - 14		76 x 76 x 51
COMBI 108/FK 150	10060526	10/100	3 - 14		76 x 76 x 51
COMBI 108/FK 230	10060525	10/100	3 - 14		76 x 76 x 51
COMBI 108/FK 250	10060524	10/100	3 - 14		76 x 76 x 51

© 2010 WISKA Hoppmann & Mulsow GmbH
Kisdorfer Weg 28
D-24568 Kaltenkirchen
Phone: +49 (0)4191 / 508-100
Fax: +49 (0)4191 / 508-209