stay connected

# MIRO 6.2 24VDC-1U OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact
24 V DC
Screw terminals

## Link to Product

### Illustration




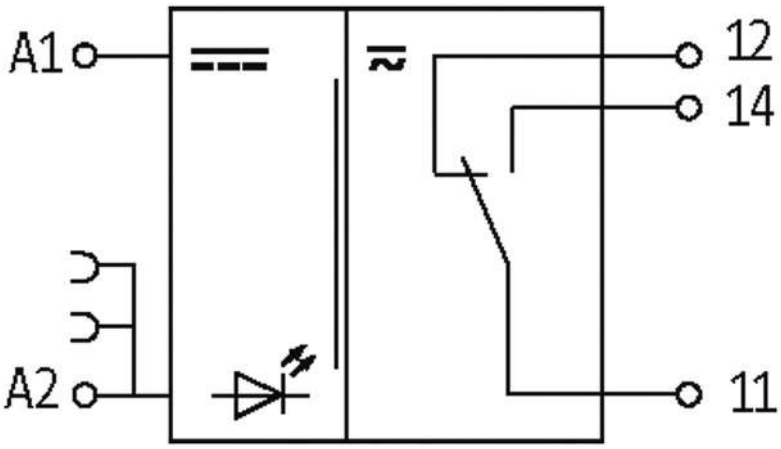


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

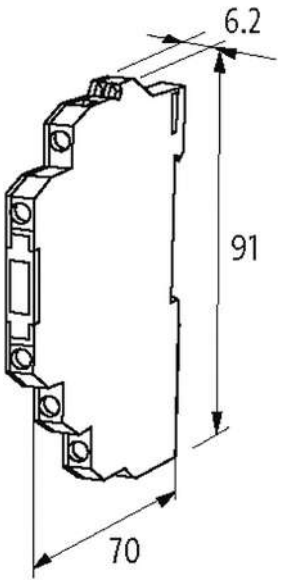


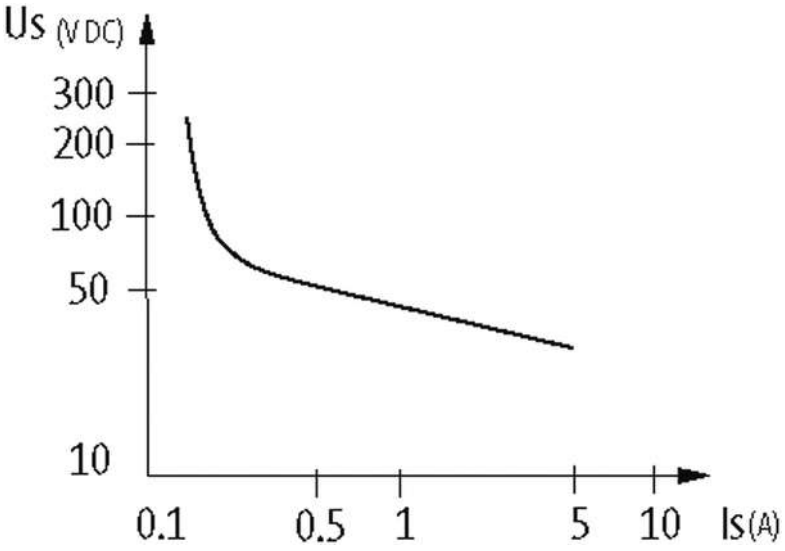


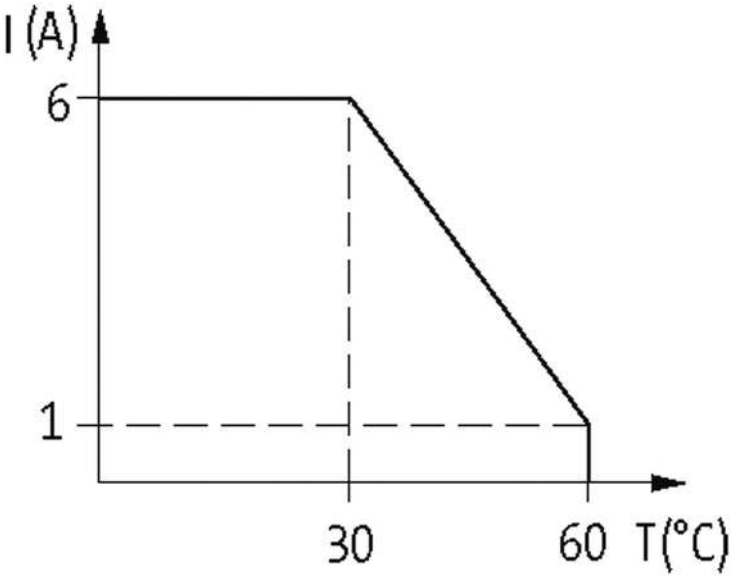


Product may differ from Image

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

MURR ELEKTRONIK
stay connected

## Approvals

## Input

| | |
|---|---|
| Connection voltage - current | 24 V DC (19.2...30 V DC) - 14 mA |
| LED display | LED (green) |

## Utilization category

| | |
|---|---|
| AC-12 | 6 A (24/110/230 V AC) |
| AC-15 | 3 A (24/110/230 V AC) |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

## General data

| | |
|---|---|
| Mech./ elect. life | 20.000.000 switching cycles/load dependent |
| Test isolation voltage | 4 kV; safe separation (EN 60947-1) |
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+55 °C |
| Dimensions H × W × D | 91×6.2×70 mm |

## Output

| | |
|---|---|
| Switching voltage | max. 250 V AC/DC |
| Switching current per output | max. 6 A |
| Min. load current | 100 mA (12 V DC) |
| Power rating (voltage dependent) | max. 1500 VA/120 W |
| Switching frequency | max. 10 Hz |
| Contact material | Ag Sn O2 |
| Energize/release/contact bounce time | 10/15/1.5 ms |

## Commercial data

| | |
|---|---|
| country of origin | CZ |
| customs tariff number | 85364900 |
| EAN | 4048879027311 |
| eClass | 27371001 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17