
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✔

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/12/10 | D.GRIFFIN |
| B | ECN 5868: ADDED LENGTHS 03 M, 075 M | 12/2/11 | D.FRISIELLO |
| C | ECN 6451: UPDATED LOGOS AND NOTES | 10/10/12 | D. DESJARDIN |
| | | | |

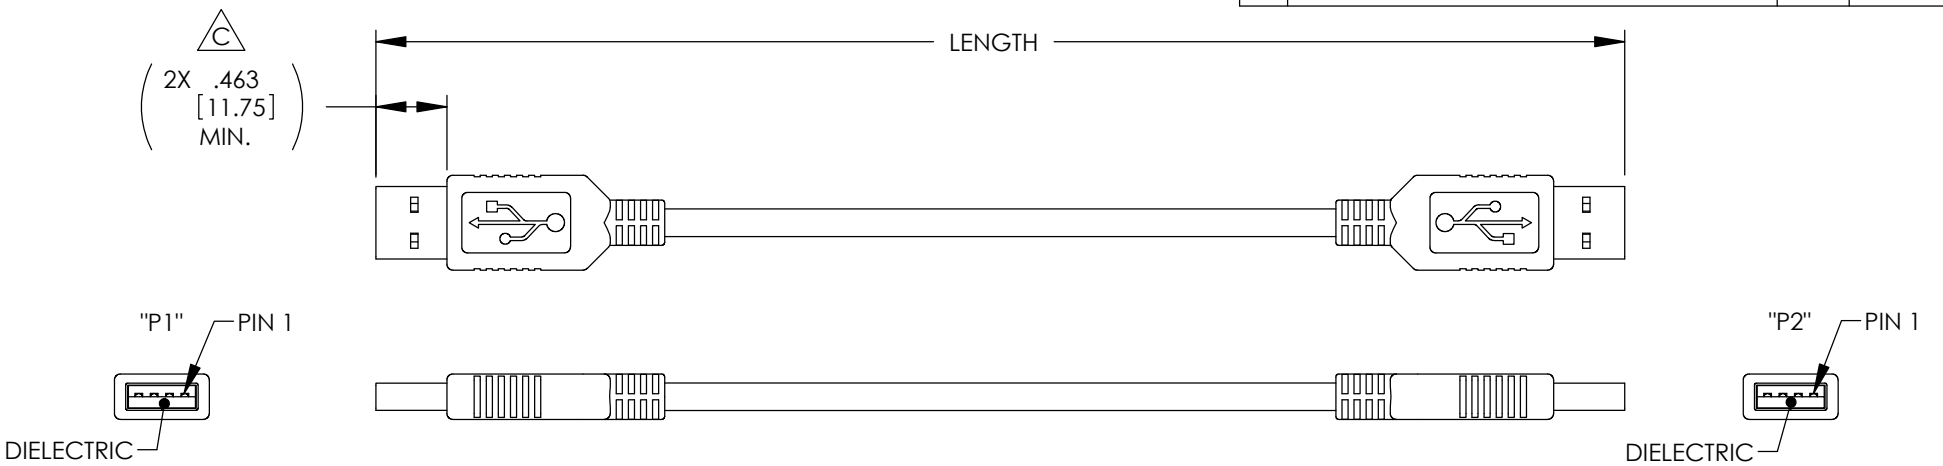


| MODEL NUMBER | LENGTH METERS [FEET] |
|---|---|
| ECUSBAA-03M | 0.3 [.98] |
| ECUSBAA-05M | 0.5 [1.64] |
| ECUSBAA-075M | 0.75 [2.46] |
| ECUSBAA-1M | 1.0 [3.28] |
| ECUSBAA-2M | 2.0 [6.56] |
| ECUSBAA-3M | 3.0 [9.84] |
| ECUSBAA-4M | 4.0 [13.12] |
| ECUSBAA-5M | 5.0 [16.41] |

"P1" WIRING DIAGRAM "P2"

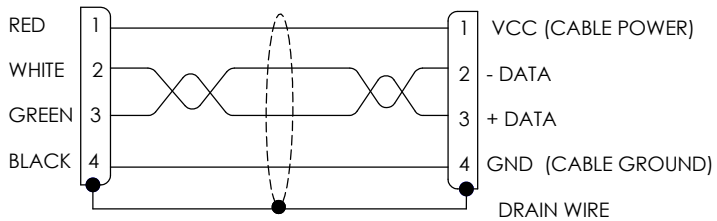


NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D. CASTRO | 11/11/10 |
| CHECKED BY D. PARHAM | 11/12/10 |
| APPROVED BY S. SMITH | 11/12/10 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL, USB A/A 28/26

SIZE A | FSCM NO. 43321 | DWG. NO. ECUSBAA | REV. C

SCALE: NONE | CAD FILE: ECUSBAA.SLDDRW | SHEET 1 OF 1