
IL5025

Inductive sensor

ILA3002-BPKG/MITTIG/0,31M/ASRT

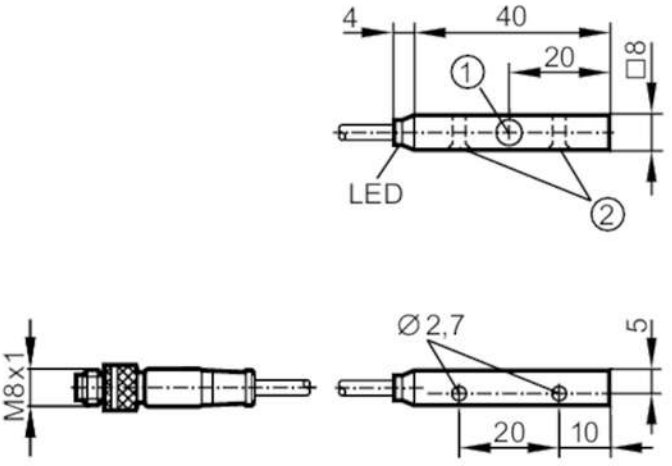

1 Sensing face
2 countersink M2.5

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	2
Housing		rectangular
Dimensions	[mm]	40 x 8 x 8
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	0...1.6

IL5025

Inductive sensor


ILA3002-BPKG/MITTIG/0,31M/ASRT

Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3	
Hysteresis	[% of Sr]	1...15	
Switch point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...70	
Protection		IP 65	
Tests / approvals			
EMC		EN 60947-5-2	
MTTF	[years]	3449	
UL approval		Ta	-25...70 °C
		Enclosure type	Type 1
		power supply	Limited Voltage/Current
		File number UL	E174191
Mechanical data			
Weight	[g]	23.4	
Housing		rectangular	
Mounting		flush mountable	
Dimensions	[mm]	40 x 8 x 8	
Materials		brass white bronze coated; sensing face: LCP	
Displays / operating elements			
Display		switching status	1 x LED, red
Accessories			
Items supplied		countersunk screws: 2 x M2,5 x 12	
Remarks			
Remarks		limited voltage requirements to UL 508: electrically isolated operating voltage protected by an overcurrent device	
Pack quantity		1 pcs.	

Electrical connection - plug

Cable: 0.31 m, PUR / PVC

Connector: 1 x M8; coding: A; Locking: knurled nut, rotatable



IL5025

Inductive sensor

ILA3002-BPKG/MITTIG/0,31M/ASRT

Connection

