


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 3/30/10 | D.GRIFFIN |
| | | | |
| | | | |
| | | | |

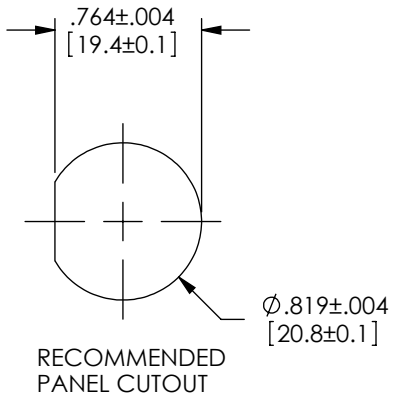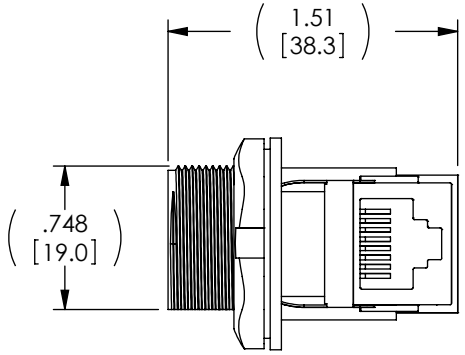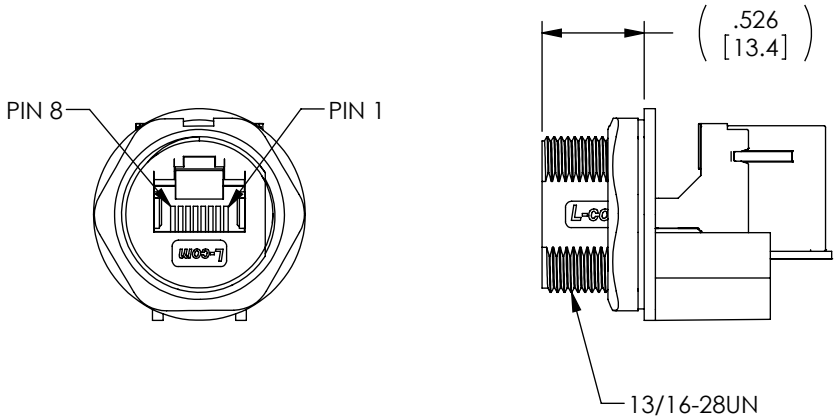


**NOTES:**

1. **MATERIAL:**
   NUT: NYLON, GLASS FILLED BLACK
   GASKET: EPDM, BLACK
   HOUSING: NYLON, GLASS FILLED, BLACK.

2. **MISCELLANEOUS:**
   INGRESS PROTECTION RATING: IP67.
   FOR PANEL THICKNESS MAX: .110" [2.8mm].
   USE WITH WATERPROOF CAP OR DUST CAP FOR PANEL THICKNESS: .063" [1.6mm].
   COMPONENT SHALL BE TESTED FOR CONTINUITY.
   COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D. CASTRO | 3/25/10 |
| CHECKED BY D. PARHAM | 3/29/10 |
| APPROVED BY P. MCNEIL | 3/29/10 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
MODULAR

PRODUCT DESCRIPTION
IP67 RJ45 RT ANGLE FEED-THRU SHIELDED

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | WPRJ-FTRACAT5E | A |

SCALE: NONE | CAD FILE: WPRJ-FTRACAT5E.SLDDRW | SHEET 1 OF 1