Schnelldruckklemme
- zum Einstecken in eine Buchse Ø 4 mm

Best.-Nr. SDK 502 / ..(Farbe)

• Kontaktteile	**vernickelt**
• Isolierteile	PA 6.6 (Polyamid)
• vorderes Einsteckfenster	6,5 mm x 4 mm
• hinteres Einsteckfenster	8 mm x 4 mm
• Druckfederkraft	20 N
• **Farben**	siehe Tabelle

Quick-release terminal
- *to plug in a socket Ø 4 mm*

Order No. SDK 502 / *..(colour)*

• *contact parts*	***nickel-plated***
• *insulation*	*PA 6.6 (Polyamid)*
• *front insertion window*	*6.5 mm x 4 mm*
• *rear insertion window*	*8 mm x 4 mm*
• *spring force*	*20 N*
• ***colours***	*see table*

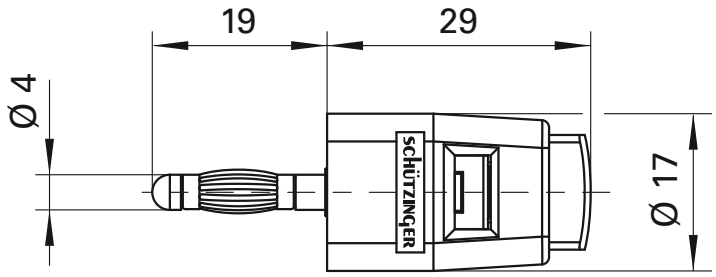



Allgemeine Angaben

Best.-Nr. [1]	**SDK 502 /** ..(Farbe) Kontaktteile vernickelt
Farben	schwarz, rot, blau, gelb, grün, grau, braun, weiß, orange, violett, grüngelb

Technische Daten

Anschluss	stecken
Durchgangswiderstand	5 mΩ
Bemessungsspannung [2]	30 V_{AC} / 60 V_{DC}
Bemessungsstrom [2]	16 A
Betriebstemperatur	von -25 °C bis +90 °C

[1] andere Farben, Anschlüsse und Federn (ca. 15 N oder 33 N) auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information

Order No. [1]	***SDK 502 /*** *..(colour)* *contact parts nickel-plated*
colours	*black, red, blue, yellow, green, grey, brown, white, orange, purple, green-yellow*

Technical data

terminal	*plug*
transition resistance	*5 mΩ*
rated voltage [2]	*30 V_{AC} / 60 V_{DC}*
rated current [2]	*16 A*
operating temperature	*from -25 °C to +90 °C*

[1] *other colours, terminals and springs (approx. 15 N or 33 N) on request*
[2] *at normal ambient temperatures*