# 11BGF0022A02460

CONTROL RELAY WITH AC COIL 60HZ, 24VAC, 2NO AND 2NC, FASTON TERMINALS



| | | | |
|---|---|---|---|
| Product designation | | | Auxiliary contactor |
| Product type designation | | | BGF00 |
| **Contact characteristics** | | | |
| Number of poles | | Nr. | 4 |
| Rated insulation voltage Ui IEC/EN | | V | 690 |
| Rated impulse withstand voltage Uimp | | kV | 6 |
| Operational frequency | | | |
| | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current Ith | | A | 10 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 0 |
| Protection fuse | | | |
| | gG (IEC) | A | 16 |
| Tightening torque for terminals | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | lbin | 9 |
| | max | lbin | 9 |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | lbin | 9 |
| | max | lbin | 9 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | | | |
| | max | | 12 |
| Flexible w/o lug conductor section | | | |
| | min | mm² | 0.75 |
| | max | mm² | 2.5 |
| Flexible c/w lug conductor section | | | |
| | min | mm² | 1.5 |
| | max | mm² | 2.5 |
| Flexible with insulated spade lug conductor section | | | |
| | min | mm² | 1.5 |
| | max | mm² | 2.5 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 when properly wired |
| **Mechanical features** | | | |
| Operating position | | | |
| | normal | | Vertical plan |
| | allowable | | ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | g | 178 |

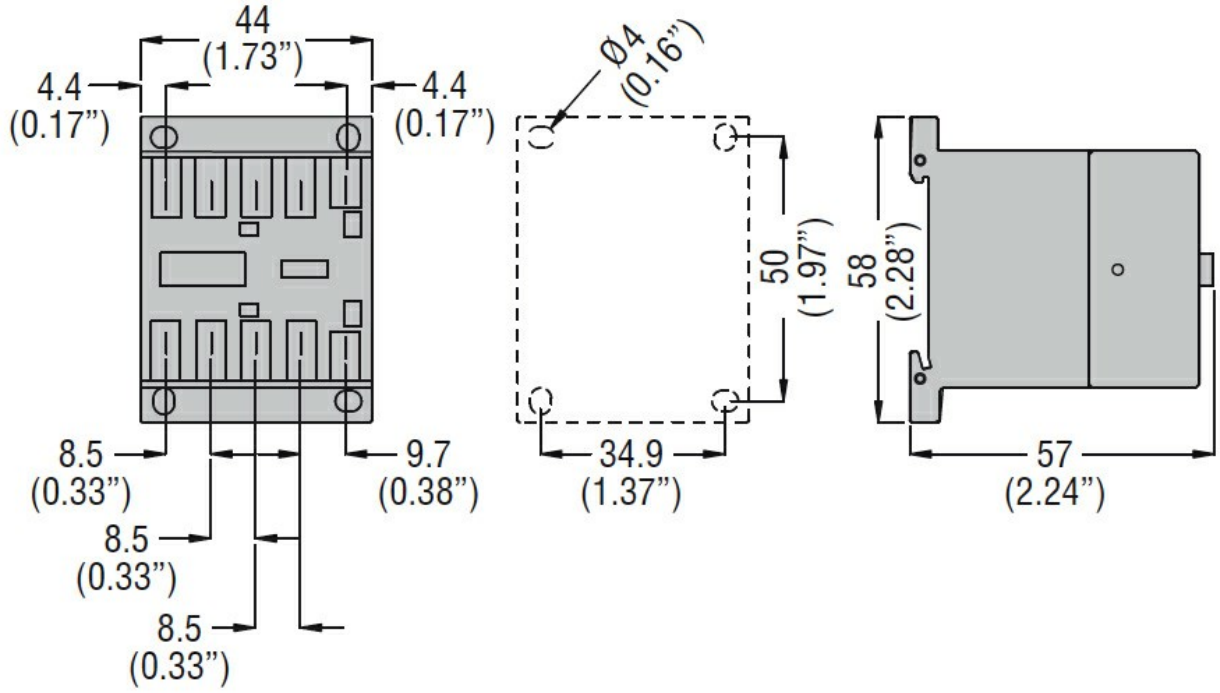

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| Conductor section | | | | |
| | AWG/kcmil conductor section | | | |
| | | max | | 12 |
| **Auxiliary contact characteristics** | | | | |
| Thermal current Ith | | | A | 10 |
| IEC/EN 60947-5-1 designation | | | | A600 - Q600 |
| Operating current AC15 | | | | |
| | | 230V | A | 3 |
| | | 400V | A | 1.9 |
| | | 500V | A | 1.4 |
| Operating current DC12 | | | | |
| | | 110V | A | 2.9 |
| Operating current DC13 | | | | |
| | | 24V | A | 2.9 |
| | | 48V | A | 1.4 |
| | | 60V | A | 1.1 |
| | | 125V | A | 0.3 |
| | | 220V | A | 0.1 |
| | | 600V | A | 0.6 |
| **Operations** | | | | |
| Mechanical life | | | cycles | 20000000 |
| **Safety related data** | | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | | |
| | | mechanical load | cycles | 20000000 |
| Mirror contats according to IEC/EN 609474-4-1 | | | | YES |
| EMC compatibility | | | | yes |
| **AC coil operating** | | | | |
| Rated AC voltage at 60Hz | | | V | 24 |
| AC operating voltage | | | | |
| | of 60Hz coil powered at 60Hz | | | |
| | | pick-up | | |
| | | | min %Us | 75 |
| | | | max %Us | 115 |
| | | drop-out | | |
| | | | min %Us | 20 |
| | | | max %Us | 55 |
| AC average coil consumption at 20°C | | | | |
| | of 50/60Hz coil powered at 50Hz | | | |
| | | | in-rush VA | 30 |
| | | | holding VA | 4 |
| | of 50/60Hz coil powered at 60Hz | | | |
| | | | in-rush VA | 25 |
| | | | holding VA | 3 |
| | of 60Hz coil powered at 60Hz | | | |
| | | | in-rush VA | 30 |
| | | | holding VA | 4 |
| Dissipation at holding ≤20°C 50Hz | | | W | 0.95 |
| **Max cycles frequency** | | | | |
| Mechanical operation | | | cycles/h | 3600 |
| **Operating times** | | | | |
| Average time for Us control | | | | |
| | in AC | | | |
| | | Closing NO | | |

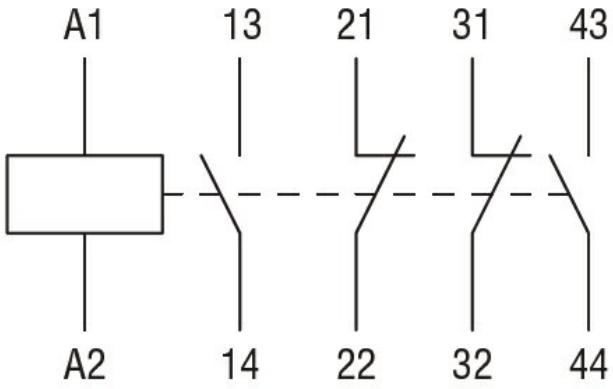

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | | |
|---|---|---|---|---|---|
| | | | min | ms | 12 |
| | | | max | ms | 21 |
| | | Opening NO | | | |
| | | | min | ms | 9 |
| | | | max | ms | 18 |
| | | Closing NC | | | |
| | | | min | ms | 17 |
| | | | max | ms | 26 |
| | | Opening NC | | | |
| | | | min | ms | 7 |
| | | | max | ms | 17 |
| | in DC | | | | |
| | | Closing NO | | | |
| | | | min | ms | 18 |
| | | | max | ms | 25 |
| | | Opening NO | | | |
| | | | min | ms | 2 |
| | | | max | ms | 3 |
| | | Closing NC | | | |
| | | | min | ms | 3 |
| | | | max | ms | 5 |
| | | Opening NC | | | |
| | | | min | ms | 11 |
| | | | max | ms | 17 |
| **UL technical data** | | | | | |
| General USE | | | | | |
| | Contactor | | | | |
| | | | AC current | A | 10 |
| Contact rating of auxiliary contacts according to UL | | | | | A600 - Q600 |
| **Ambient conditions** | | | | | |
| Temperature | | | | | |
| | Operating temperature | | | | |
| | | | min | °C | -50 |
| | | | max | °C | +70 |
| | Storage temperature | | | | |
| | | | min | °C | -60 |
| | | | max | °C | +80 |
| Max altitude | | | | m | 3000 |
| **Resistance & Protection** | | | | | |
| Pollution degree | | | | | 3 |
| **Dimensions** | | | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding




## Wiring diagrams




## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 60947-1 |
| CSA C22.2 n° 60947-5-1 |
| IEC/EN 60947-1 |
| IEC/EN 60947-5-1 |
| UL 60947-1 |
| UL 60947-5-1 |

Certificates

| |
|---|
| CCC |
| cULus |
| EAC |

## ETIM classification

ETIM 8.0

EC000196 - Contactor relay


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding