www.flex-tools.com

this is proformance FLEX

MS 1706 FR

Wall chaser for push and pull cutting

Order no. 329673

GTIN 4030293124813



- Microprocessor electronics: with tachogenerator constant speed control, soft start, overload protection and temperature monitoring
- Patented swivel-mounted motor (EP1693169) allows for push and pull cutting.
- Optimal dust extraction and maximum safety due to enclosed guard
- Tool-free blade changing and slit width adjustment
- Rotating adaptor for dust extractor
- Tool-free cutting depth adjustment
- Plunge cut stop
- Chases two parallel slots up to 35 mm deep and 30 mm wide
- Slot breaker for easy removal of the remaining material without a hammer
- This machine is also available in 110 V

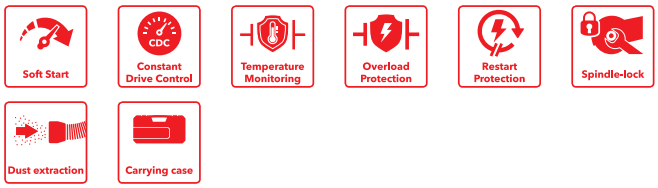

Technical data

Power consumption	1400 W
Power output	950 W
Voltage	230 V
Frequency	50/60 Hz
Cutting depth	0-35 mm
Groove width	10-30 mm
Disc diameter	140 mm
Max. no-load speed	7500 rpm
Tool holder, wall chaser	M14
Cable length	4.0 m
Dimensions WxLxH	410 x 180 x 250 mm
Weight	4.6 kg

Standard equipment

2 Diamantjet VI - Speedcut (334464)
1 Side handle, red (194034)
1 SDS-Clic quick-clamp nut (253049)
1 Distance spacers (251478)
2 Stacking discs (318914)
2 Clamping flange, SW 14 (191612)
1 Slot breaker (229253)
1 Clip adapter (408360)
3 Cable clip (252188)
1 Carrying case (327034)