Installation testers

Digital multimeter- Cat III 600 V

This digital multimeter is compact 3 1/2 digit.
For measuring DC and AC voltage and current, resistance, continuity and temperature.
- AC frequency response: 40 - 400 HZ
- DC voltage: 200 mV/2 V/20 V/200 V/600 V
- AC voltage: 200 mV/2 V/20 V/200 V/600 V
- DC current: 200 µA/2000 µA/200 mA/2 A/10 A
- AC current: 200 µA/2000 µA/200 mA/2 A/10 A
- Resistance: 200 Ω/2 kΩ/20 kΩ/ 200 kΩ/2 MΩ/20 MΩ
- Capacitance: 20 µF 200 µF/2 µF/20 µF/200 µF/1000 µF

General specifications
- 3 1/2 digital multimeter, 30 ranges, 70 x 50 mm LCD display, 1999 counts max.
- Back light, data hold
- Diode, triode performance testing, continuity test (audible)

General characteristics
- Battery: 3 x 1.5 V AAA batteries
- Low battery indication level on LCD
- Operation temperature: 0°C / 40°C, < 75%RH
- Storage temperature: -10°C / 50°C, < 85%RH



MX-701	158 x 75 x 35 mm - Weight: 200 g

Digital clamp meter - Cat III 600 V

This digital clamp meter is compact 3 1/2 digit.
Autorange for measuring DC and AC voltage, AC current, resistance, diode, continuity and temperature.
AC current: 2 A - 600 A.
AC voltage: 2 V - 600 V. DC voltage: 0.2 V - 600 V.
Resistance: 200 Ω - 20 MΩ. Continuity: buzzer (< 50 Ω).
Temperature range: -40°C/+1000°C -40°F/-1832°F.

General specifications
- Display: 3 1/2 digit LCD with a max. reading of 1999
- Polarity: auto polarity indication
- Overrange indication: “OL” or “-OL”
- Automatic zeroing function
- Sensor: clamp-shape transformer for AC measurement
- Jaw opening capability: Ø 36 mm
- Max. measurable conductor: Ø 30 mm

General characteristics
- Battery: 2 x 1.5 V AAA batteries
- Low battery indication
- Operation temperature: 0°C / 40°C, < 75% RH
- Storage temperature: -20°C / 60°C, < 85% RH



MX-702	190 x 70 x 38 mm - Weight: 220 g

POINTEST™ Safety test probes for multimeter and clamp-meter

Safety test probes for multimeter and clamp-meter use only.
4 mm retractable shrouded plugs, 4 mm standard socket or 1.20 m double sheathed lead,
Probes 26 mm length, 1 000 V A.C or D.C, IP2X.

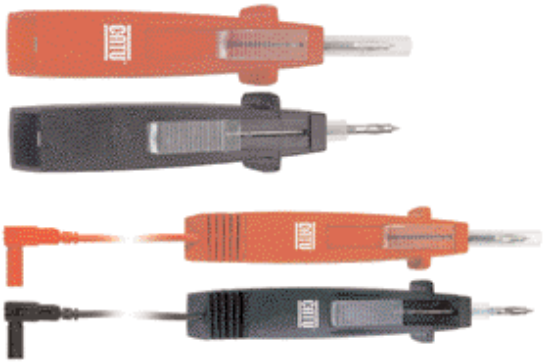

DX-02001	Set of 2 contact probes, black and red with socket
DX-02002	Set of 2 contact probes, black and red1.20 m lead