


## PIN OUT

| CN1 (568B) | | CN2 (568B) |
|---|---|---|
| WHITE-ORANGE | 1 — 1 | WHITE-ORANGE |
| ORANGE | 2 — 2 | ORANGE |
| WHITE-GREEN | 3 — 3 | WHITE-GREEN |
| GREEN | 6 — 6 | GREEN |
| BLUE | 4 — 4 | BLUE |
| WHITE-BLUE | 5 — 5 | WHITE-BLUE |
| WHITE-BROWN | 7 — 7 | WHITE-BROWN |
| BROWN | 8 — 8 | BROWN |

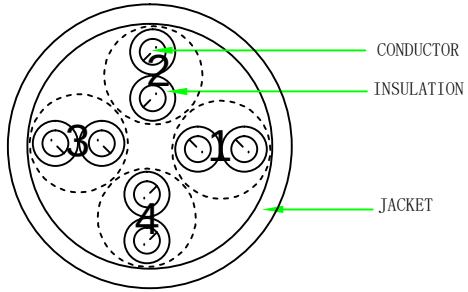



## NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical test:100% open short & miss wire test;
4. OPERATING TEMPERATURE:-10℃ ~ 60℃
5. Print word: CAT6A U/UTP 4x2x32AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2
6. Minimum of the bending radius is 30mm(Suitable for all meters)

| Color: Black(Pantone 3C) | |
|---|---|
| ITEM No. | LENGTH |
| 21.15.3950 | 150±5mm |
| 21.15.3951 | 300±10mm |
| 21.15.3952 | 500±30mm |
| 21.15.3953 | 1000±30mm |
| 21.15.3954 | 1500±50mm |
| 21.15.3955 | 2000±50mm |
| 21.15.3956 | 3000±70mm |
| 21.15.3957 | 5000±70mm |

Minium of the bending3




## MATERIAL LIST

| NO. | PARTS NAME | SPECIFICATION STANDARD | QT'Y | REMARK |
|---|---|---|---|---|
| ③ | CABLE | CAT.6A U/UTP CABLE (32AWG BC*1P)*4+JACKET:LSZH/BLACK,OD:3.4±0.2mm | 1 | |
| ② | Over mold | 48P PVC/BLACK | 2 | |
| ① | Plug | RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u″,TRANSPARENT | 2 | |

| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |
|---|---|---|---|---|
| | | | | |
| | | NEW | 2019-06-17 | A |

| DESC. | ROLINE Cat.6A UTP Patch Cord, LSOH, Slim, Black |
|---|---|

SECOMP