Laserliner®


LaserRange-Master T4 Pro



Laser distance meter – with Bluetooth interface and angle function

Rev.1116



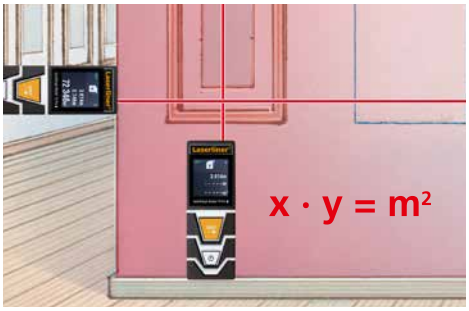




– **Point-precise measuring with laser** to determine lengths exactly
– **The area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
– **Bluetooth interface** for measurement data transfer
– **360° inclination sensor** for determining the horizontal and vertical distance
– **High measuring accuracy** up to 40 m: ± 2 mm*
– **Inside measurement range: 0.2 m to 40 m**
– **3 selectable measurement reference points:** front, tripod and rear
– **Continuous measuring function**
– Illuminated 3-line **colour LCD** with touch function
– Stable, ergonomic housing

TECHNICAL DATA
ACCURACY ± 2 mm (typical)*
MEASUREMENT RANGE max. 40 m
MINIMAL RANGE 0,2 m
LASER Class 2 < 1mW
LASER WAVELENGTH 650 nm
OPERATING TEMPERATURE -10°C … 40°C
STORAGE TEMPERATURE -20°C … 70°C
UNIT (selectable) m / ft / inch / _'_"
AUTOMATIC SWITCH-OFF dynamic depending on measuring mode: Laser: 30 s - 5 min Device: 3 min - 8 min
FUNCTIONS distances, areas, volumes, continuous measurement, Pythagoras 1 + 2, angle function 1 + 2
POWER SUPPLY Batteries 2 x 1.5 V type AAA
DIMENSIONS (W x H x D) 100 x 23 x 35 mm
WEIGHT with batteries 82 g

* See operating instructions for specific accuracies



Illuminated colour LCD



Multi purpose functions



Touch screen for switching functions



LaserRange-Master T4 Pro
inclusive softbag
+ batteries (2 x 1.5 V type AAA)
Packaging dimension (W x H x D)
–

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master T4 Pro	080.850A	4 021563 698158	5

Laser 650 nm | 2 | SPEED SHUTTER | Bluetooth | Laserliner | 1/4" | 2x AAA | SOFT

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com