
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/02/03	MCCORMICK
B	REVISED TOLERANCES (ECN 1489)	09/08/03	MCCORMICK
C	INSULATOR WAS POLYPROPYLENE (ECN 1576)	11/03/03	MCCORMICK
D	ECN 3194: UPDATE DWG FORMAT	2/8/08	D.GRIFFIN

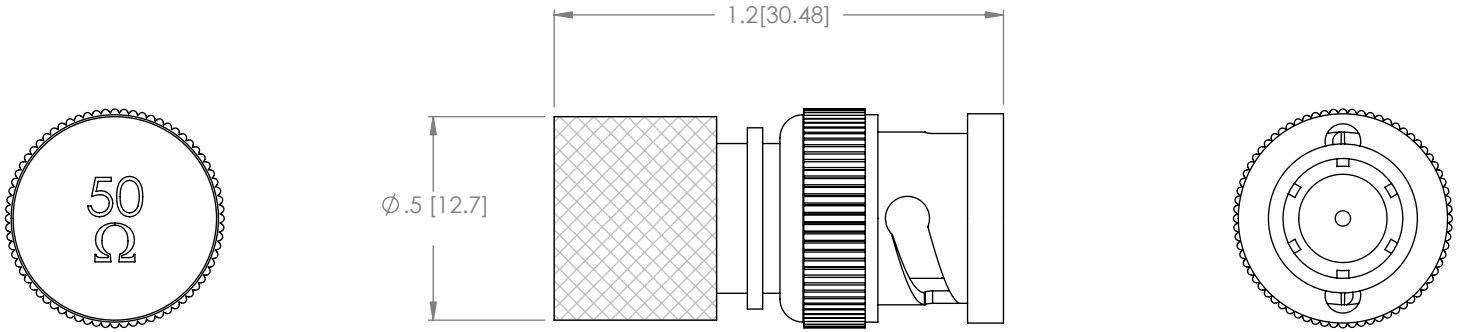

BNC PLUG

NOTES:

MATERIALS:
SHELL: BRASS
CONTACTS: BRASS
INSULATOR: ACETAL

FINISH:
SHELL: NICKEL
CONTACT: GOLD

ELECTRICAL:
CHARACTERISTIC IMPEDANCE: 50 OHM

APPLICATION NOTES:
RESISTOR; 1/4 WATT CARBON FILM TYPE

PACKAGING:
INDIVIDUALLY PACKAGE IN A POLYBAG

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]
OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / - 0
> 60 [1524] +5% / -0%
PROJ

APPROVALS	DATE
DRAWN BY C.MCCORMICK	11/01/2001
CHECKED BY D.PARHAM	11/01/2001
APPROVED BY R.CARRICK	11/01/2001

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: COAXIAL

PRODUCT DESCRIPTION: 50 OHM BNC TERMINATOR

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BTB5MD	D

SCALE: NONE | CAD FILE: BTB5MD.SLDDRW | SHEET 1 OF 1