
PRKT...

MICRO (M12) Single-Ended Cordset
4 and 5 Pole, Female, Straight, PVC Cable with Stainless Steel Coupling Nut



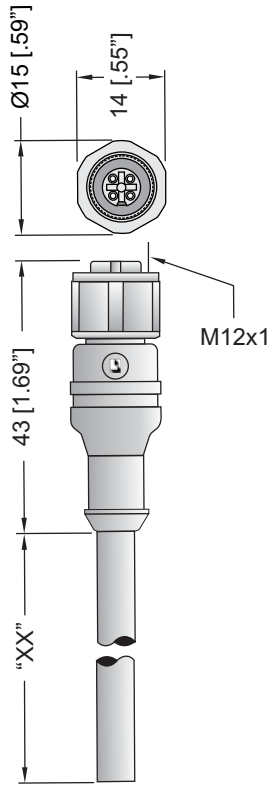


Technical Data

Material	
Molded Body	PVC, Orange
Coupling Nut	Stainless Steel
Contacts	Brass, gold over nickel plated
Insert	PVC, Orange
O-Ring	EPDM
Electrical	
Current Rating	4A
Voltage Rating	
4 Pole	250 V
5 Pole	32 VAC/VDC
Mechanical	
Temperature	-25°C to +70°C
Protection	IP 69 K
Cable Specifications	
Cable Jacket	PVC, Orange
Overall Diameter	
4 Pole	5.0mm
5 Pole	5.7mm
Conductor	
4 Pole	0.25mm², stranded
5 Pole	0.34mm², stranded
Certifications	


Features & Benefits

- 316L/V4A stainless steel coupling nut
- PVC inserts, molded body and cable jacket
- EPDM O-ring seal
- IP 69 K rated

Pin Assignments



1 - Brown
2 - White
3 - Blue
4 - Black



1 - Brown
2 - White
3 - Blue
4 - Black
5 - Gray

Part Number	Poles
PRKT 4-07/5M	
PRKT 4-07/10M	4
PRKT 4-07/25M	
PRKT 5-56/5M	
PRKT 5-56/10M	5
PRKT 5-56/25M	

© Copyright 2004. All rights reserved. Printed in the United States Of America AC FB T06 0604

Lumberg, Inc. • 14121 Justice Road • Midlothian, VA 23113-USA • Tel: 804.379.2010 • Fax: 804.379.3232 • info@lumbergusa.com