Raytech New

Little Joint L

IP68 and IP69K, gel pre-filled micro joint, space-saver complete with connectors and with minimal aesthetic impact.

Electrical performance:
CEI EN 50393
as applicable

Gel: UL 94-HB

Operating temperature 90°


Installation temperature: -40°C / +50°C

Fully submersible

Can be used underground


IP68 OFFICIALLY TESTED | IMQ

IP69K OFFICIALLY TESTED

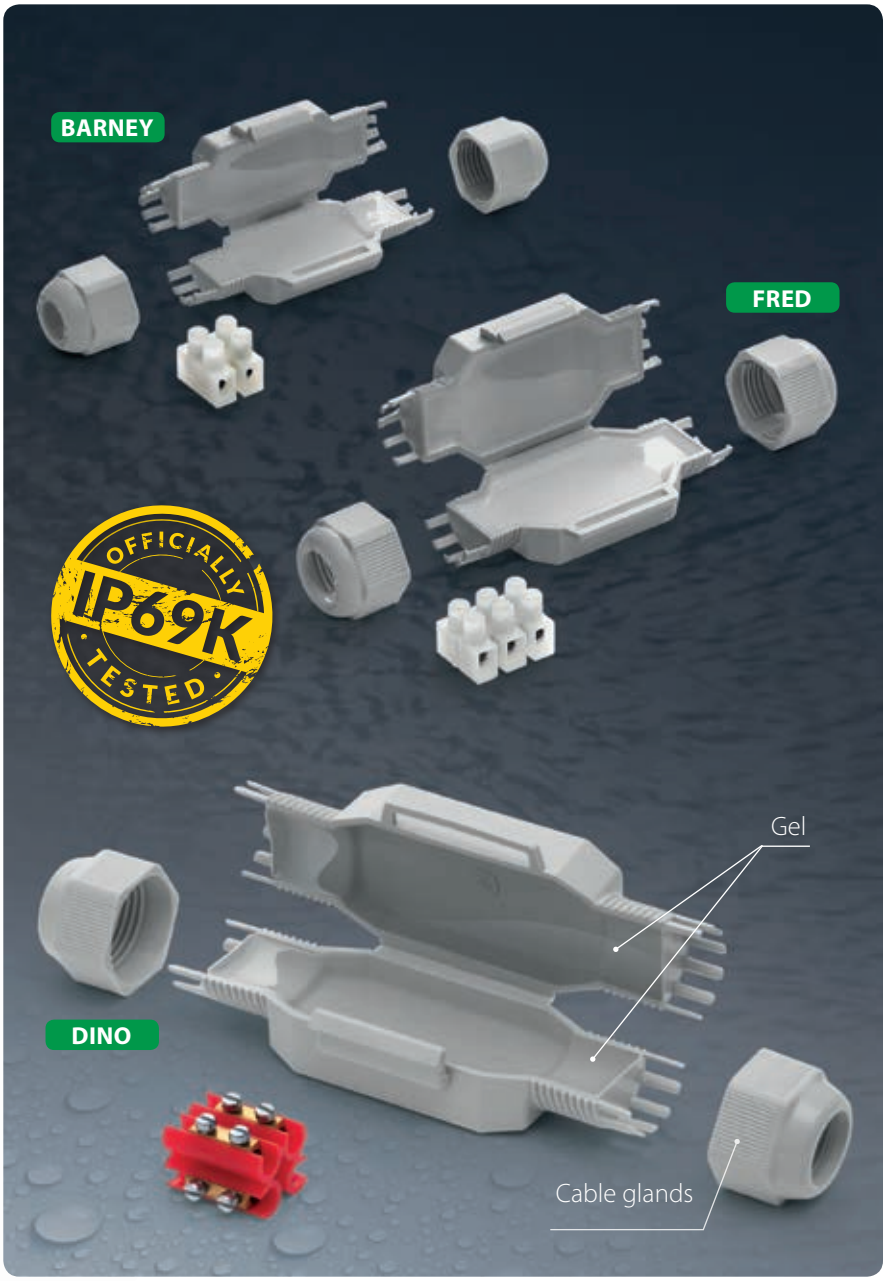



- Equipped with cable glands to avoid accidental cable traction
- Complete with screw connectors
- Pre-filled with non-toxic, non-classified gel
- Very compact and ready to use
- Always re-enterable
- Halogen free & UV resistant

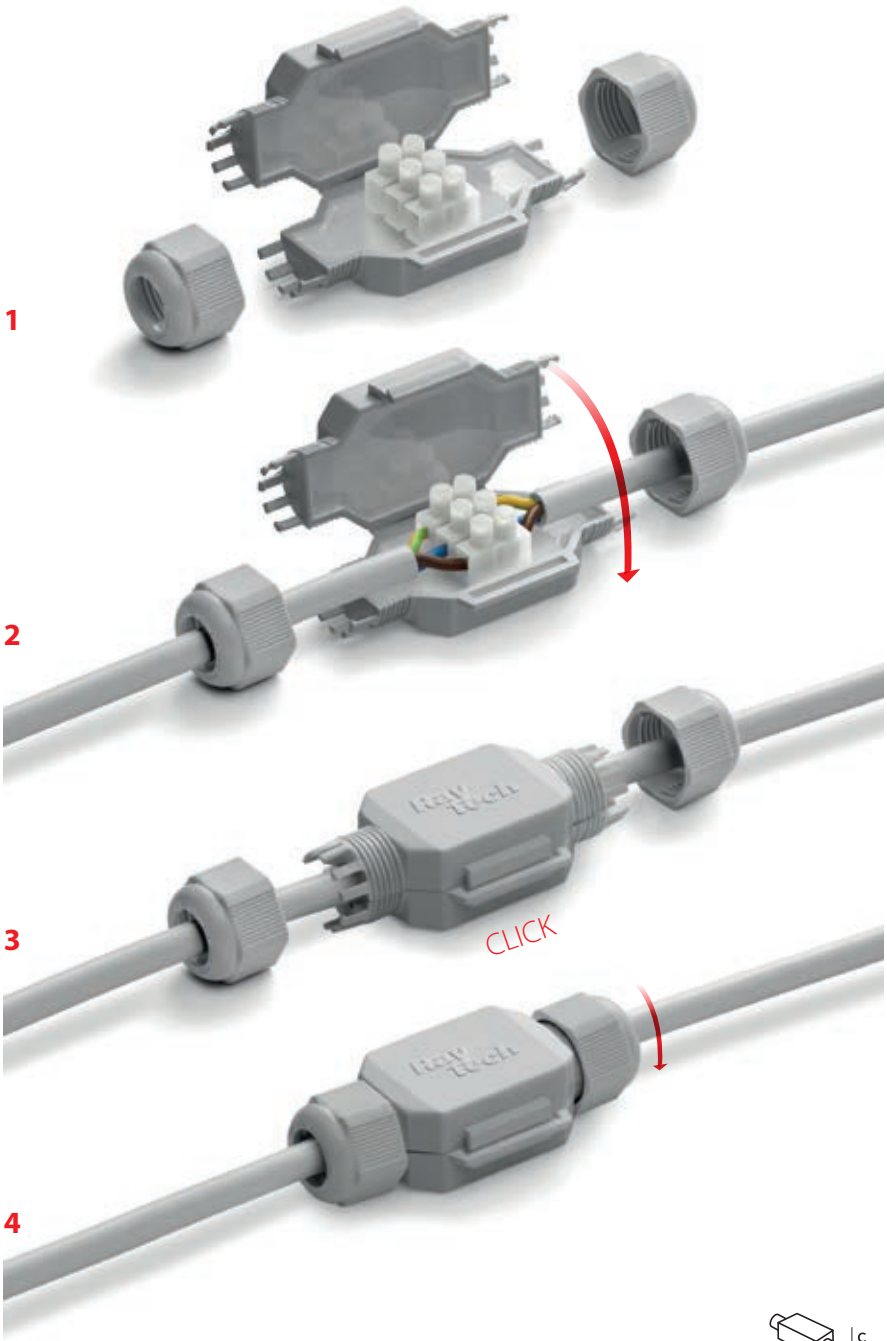






For use in traps, in lampholders for LED spotlights, especially in the presence of water and moisture, thanks to its very small size.



*Little*Joint *L*



Product	Colour	Connector	Cable formation max (N° x mm²)	Ø cables min - max (mm)	Pieces / Pack	A x B x C (mm)
Barney	●		2 x 2,5	6 - 10	1 / Blister	75 x 28 x 19
Barney - N	●				1 / Blister	
Barney MP	●				10 / Multipack	
Fred	●		3 x 2,5	8 - 13	1 / Blister	80 x 36 x 23
Fred - N	●				1 / Blister	
Fred MP	●				10 / Multipack	
Fred/4	●		3 x 4	8 - 13	1 / Blister	80 x 36 x 23
Fred/4 - N	●				1 / Blister	
Dino	●		4 x 4	10 - 16	1 / Blister	125 x 43 x 35
Dino - N	●				1 / Blister	



Ray tech