


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4492: REVISED DRAWING, NOTES, CHART, NEW FORMAT	1/13/10	D.FRISIELLO


DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD PLATE
SHELL	BRASS	GOLD PLATE
INSULATOR	PTFE	-
PIN	BRASS	30µ IN GOLD PLATE
FERRULE	BRASS	GOLD PLATE
INSULATOR, CAP	PTFE	-
CAP	BRASS	GOLD PLATE
SHRINK TUBE	PE	-








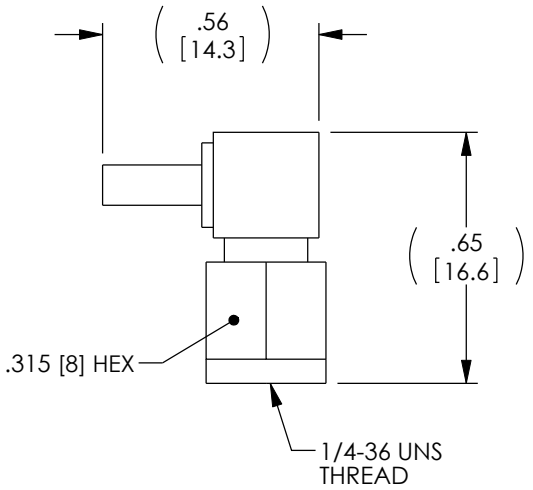

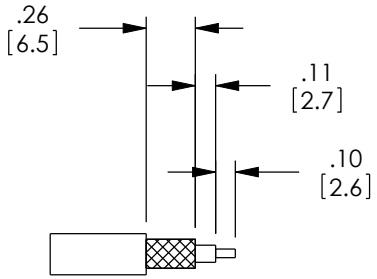

RECOMMENDED
CABLE STRIPPING
DIMENSIONS



RECOMMENDED FERRULE
CRIMP SIZE
*CENTER PIN: SOLDER

RoHS Compliant ✔

NOTES:

1. INDIVIDUALLY PACKAGE EACH ASSEMBLY UTILIZING APPROPRIATE SIZED BAG.
2. APPLICATION: RG316, RG188, AND RG174 CABLE ASSEMBLIES.
3. IMPEDANCE: 50 OHMS

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.01
.XXX = ±.005
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

APPROVALS	DATE
DRAWN BY MCCORMICK	12/19/2001
CHECKED BY D.PARHAM	12/19/2001
APPROVED BY R.CARRICK	12/19/2001

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
RIGHT ANGLE SMA CRIMP PLUG

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BAC02A-G	E

SCALE: NONE | CAD FILE: BAC02A-G.SLDDRW | SHEET 1 OF 1