CNH20

Auxiliary contact, 2NO



Product designation			AUXILIARY CONTACTS
Product type designation			CN
Number of DIN modules			0.5
Electrical features			
IEC Conventional free air thermal current Ith		A	6
Rated insulation voltage Ui IEC/EN		V	500
Rated impulse withstand voltage Uimp		kV	4
Minimum switching capacity			≥12V ≥5mA
Control circuit			
Auxiliary contacts			
	NO	Nr.	2
Operations			
Mechanical life		cycles	3000000
Ambient conditions			
Operating temperature			
	min	°C	-5
	max	°C	55
Storage temperature			
	min	°C	-30
	max	°C	80
Max altitude		m	2000
Mechanical features			
Tightening torque for terminals			
	max	Nm	0.8
Terminals tool			PZ2
Weight		g	44
Resistance & Protection			
Pollution degree			3
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

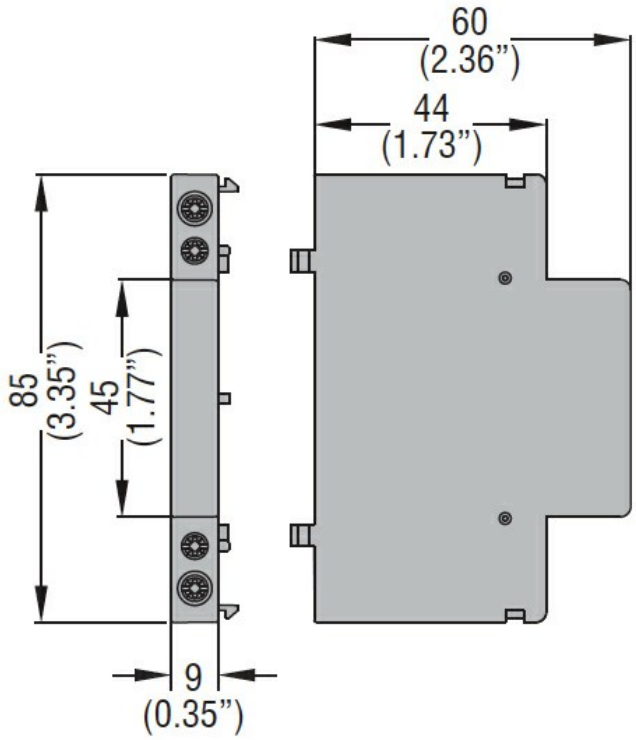

Wiring diagrams



Certifications and compliance

Compliance

	IEC/EN 60947-1
	IEC/EN 60947-4-1
	IEC/EN 60947-5-1
	IEC/EN 61095

Certificates

	EAC

ETIM classification

ETIM 8.0	EC000041 - Auxiliary contact block

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding