THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 3/6/12 | D.GRIFFIN |
| B | ECN 6064: UPDATED COMPATIBILITY NOTE TO WINDOWS 7 AND HIGHER | 3/30/12 | D. DESJARDIN |
| | | | |
| | | | |

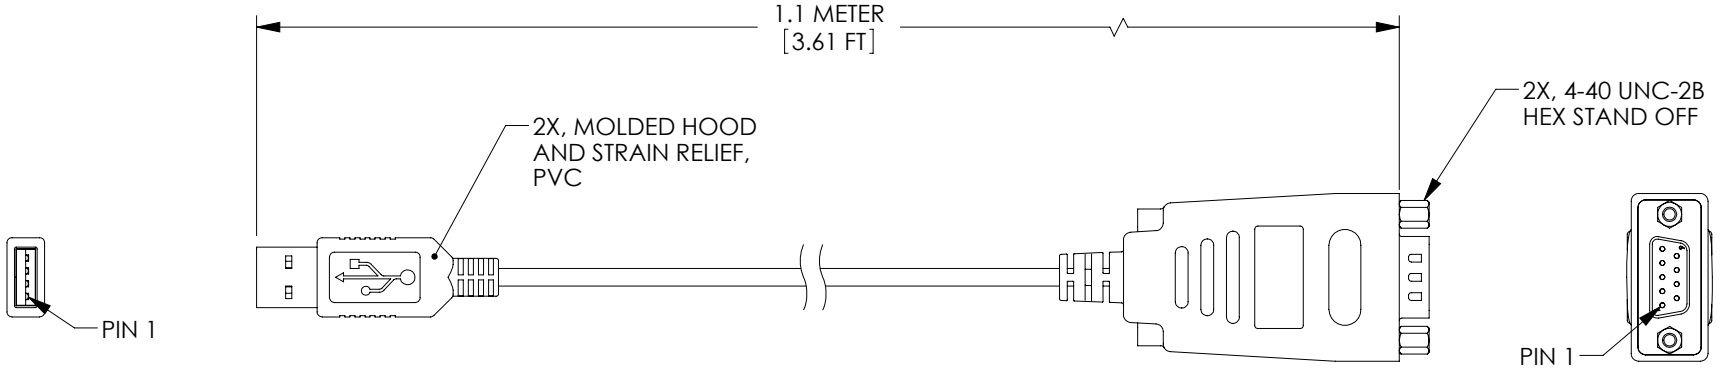


"J1"
USB TYPE A MALE
CONNECTOR

"J2"
DB9 MALE
CONNECTOR

FEATURES:

FULL COMPLIANCE WITH USB VERSIONS 2.0 & 1.1

SUPPORTS THE ASYNCHRONOUS SERIAL INTERFACES.

OVER 1Mbps DATA TRANSFER RATE.

COMPATIBLE WITH WINDOWS 98SE / ME / 2000 / XP / VISTA.
MAC OS 8.6 / OS-9 / OS-X, LINUX, WIN CE, WIN SERVER 2003, WIN SERVER 2008
B AND WINDOWS 7 AND HIGHER.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

**RoHS Compliant** ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D.FRISIELLO | 3/5/12 |
| CHECKED BY D.PARHAM | 3/5/12 |
| APPROVED BY S.SMITH | 3/5/12 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
USB TO RS232 SERIAL CBL 1 MTR

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | UMC-201 | B |

SCALE: NONE | CAD FILE: UMC-201.SLDDRW | SHEET 1 OF 1