

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES RA2588M-OD1	10/14/14	D. DESJARDIN

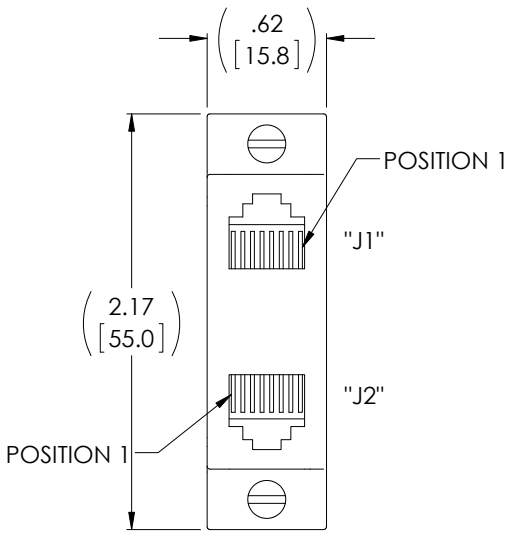

2X RJ45 JACK
(8P8C)

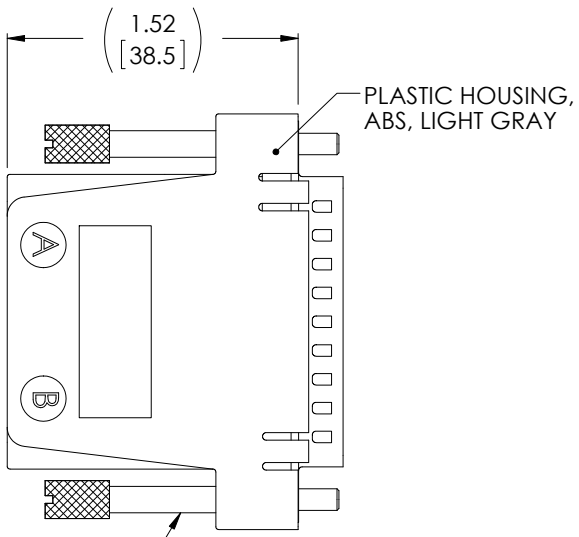


2X 4-40 NICKEL PLATED
JACKSCREW WITH KNURLED HEAD

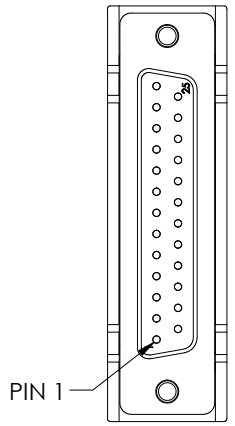

"P1"
25 PIN MALE
D-SUB CONNECTOR

WIRING CHART		
"J1"	"J2"	COLOR
PIN 1	PIN 1	BLUE
PIN 2	PIN 2	ORANGE
PIN 3	PIN 3	BLACK
PIN 4	PIN 4	RED
PIN 5	PIN 5	GREEN
PIN 6	PIN 6	YELLOW
PIN 7	PIN 7	BROWN
PIN 8	PIN 8	WHITE

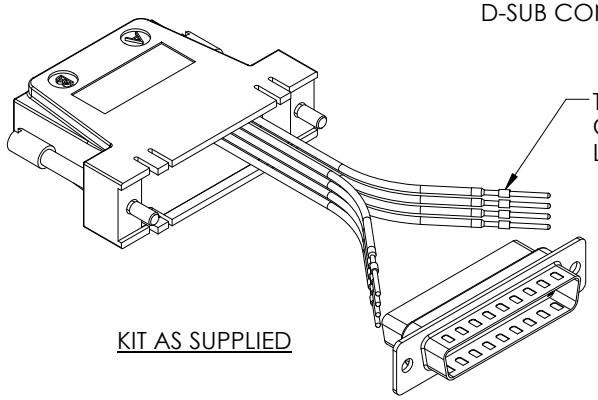

KIT AS SUPPLIED

NOTES:

1. LEADS: UL1061, 26 AWG STRANDED COPPER

2. ADAPTER KIT SHALL BE INDIVIDUALLY PACKAGED UN-ASSEMBLED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY MCCORMICK	12/27/01
CHECKED BY D.PARHAM	12/27/01
APPROVED BY R.CARRICK	12/27/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
TELECOM/MODULAR

PRODUCT DESCRIPTION
ADAPTOR KIT, DB25M/(2) RJ45 JK

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	RA2588M	A

SCALE: NONE | CAD FILE: RA2588M.SLDDRW | SHEET 1 OF 1