Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC



1000 VDC · · 600 VAC/DC · 30 A (UL/CSA)

Description
- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

Standards
- IEC 60269-2, -4, -6
- UL 4248-1
- CSA C22.2 no. 39

Approvals
- UL File Number: E39328
- CSA File Number: 248899

Applications
- Combiner Boxes in Photovoltaic Systems

References
Fuseholder to ASO 10.3x38

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	DIN-Rail Mounting
Terminal	Press plate: 2 - 10 mm² / AWG #8 - 14 (stranded), 2 - 6 mm², AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque)
Rated Voltage	1000 VDC (Self certified), 600 VAC/ DC (UL/CSA)
Rated current	30 A (UL/CSA)
Rated Power Acceptance IEC	max. 4 W (self certified)
Degree of Protection	IP 20
Admissible Ambient Air Temp.	-40 °C to 130 °C
Material: Socket	Thermoplastic, UL 94V-0
Unit Weight	54 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Tech. Information

Dimension

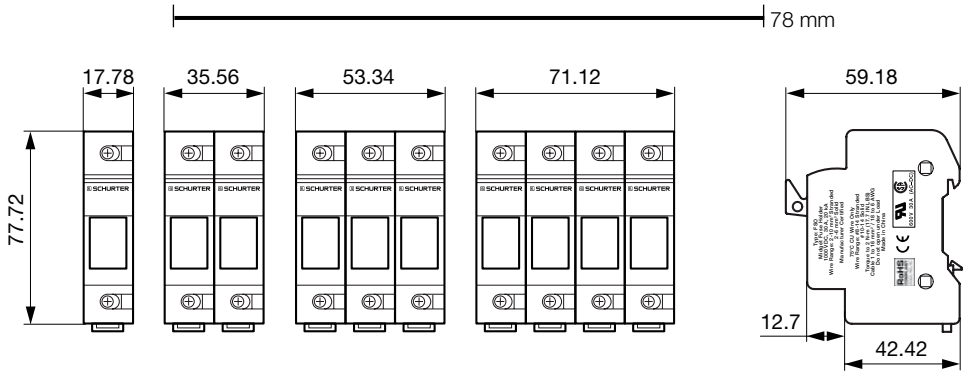

Do not open under load

All Variants

Holder	Remark	Order Number	
●	1 Pole	0091.0001	▮
●	2 Poles	0091.0002	▮
●	3 Poles	0091.0003	▮
●	4 Poles	0091.0004	▮

▮ Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit	0091.0001	Bulk (10 pcs.)
	0091.0002	Bulk (5 pcs.)
	0091.0003	Bulk (4 pcs.)
	0091.0004	Bulk (3 pcs.)

10.03.2015

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.