
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	07/02/01	MCCORMICK
B	REVISED; ADDED THREAD CALLOUT AND PANEL OPENING	03/25/02	MCCORMICK
C	ECN 3124: UPDATE DWG FORMAT	12/19/07	D.GRIFFIN
D	ECN 5950: REVISED PER VENDOR SPECIFICATIONS, NEW FORMAT	2/1/12	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
DIELECTRIC	TEFLON	-
CENTER CONTACT	BRASS	GOLD PLATE
LOCK WASHER	BRASS	NICKEL PLATE
NUT	BRASS	NICKEL PLATE
WATERPROOF SEAL	RUBBER	-

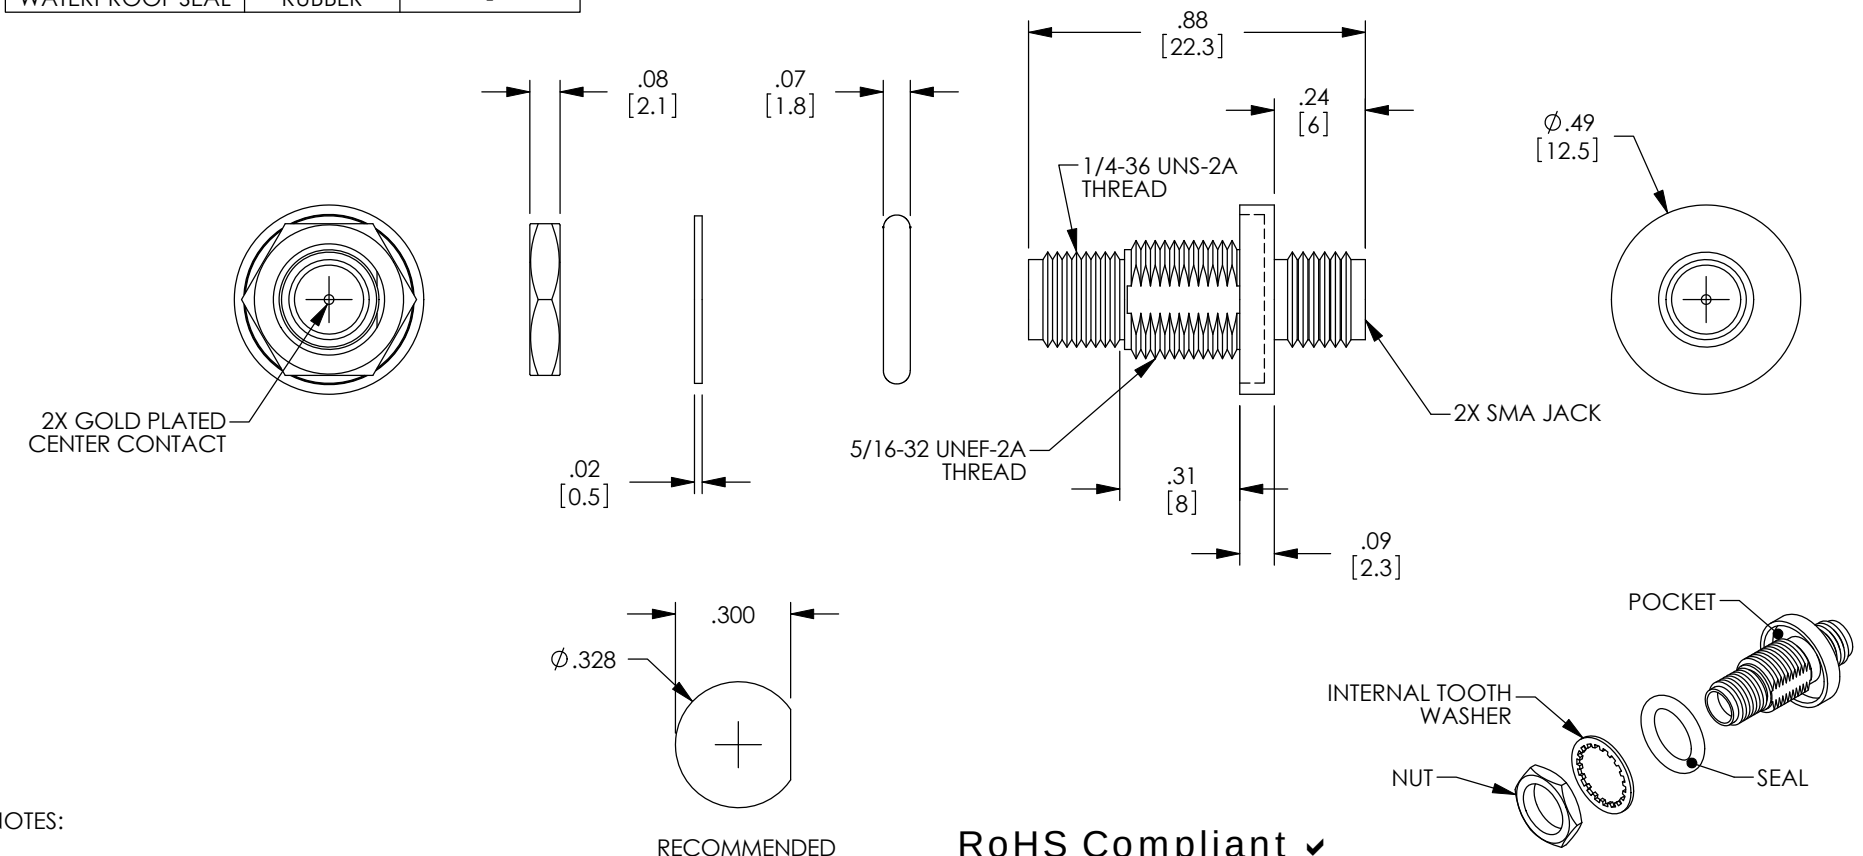

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC ~ 6 GHz
VOLTAGE RATING: 500 VOLTS PEAK
DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS
INSERTION LOSS: .15dB MAX.

MISCELLANEOUS:
ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED
IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY MCCORMICK	06/13/01
CHECKED BY D.PARHAM	07/02/01
APPROVED BY ENG	07/02/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
SMA JACK BULKHEAD ADAPTOR

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BA21	D

SCALE: NONE | CAD FILE: BA21.SLDDRW | SHEET 1 OF 1