
SMF750

Magnetic-inductive flow meter

SMGX0KGFFRKG/UST

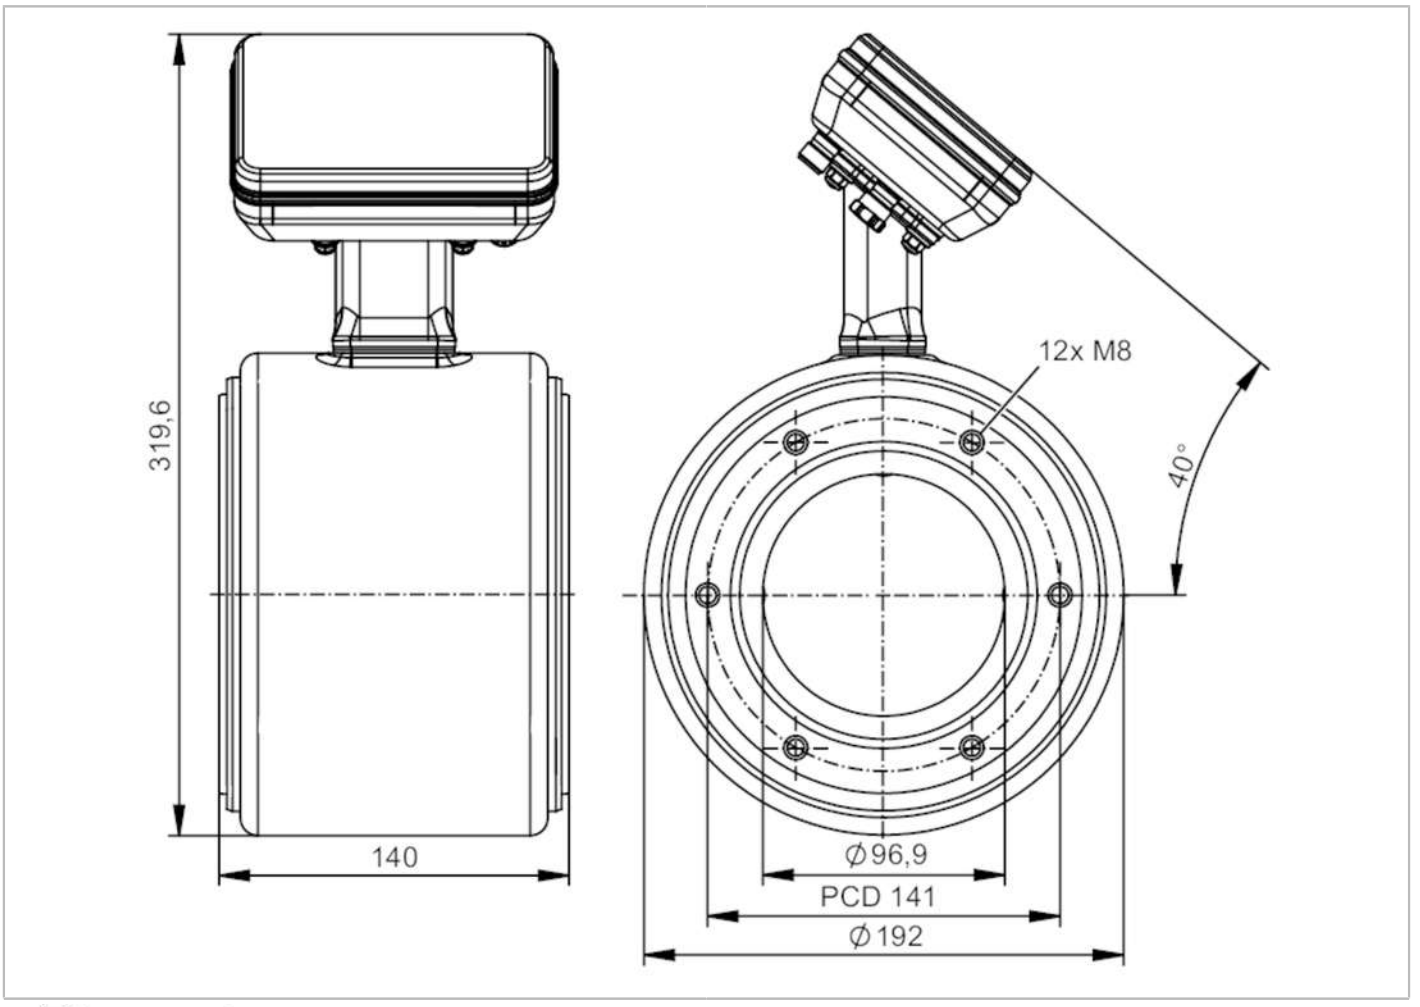

Product characteristics				
Measuring range	50...5000 l/min	3...300 m³/h	13.2...1321 gpm	0.33...32.8 ft/s
Nominal diameter	DN100 (4“)			
Process connection	ifm-specific device flange			
Application				
Special feature	Gold-plated contacts			
Application	food and beverage industry			
Media	conductive liquids; water; hydrous media			
Note on media	food products such as beer, milk, fruit juices, soft drinks, ketchup, yoghurt, yoghurt toppings, ice cream			
	conductivity: ≥ 5 µS/cm			
Medium temperature [°C]	-20...150			
Min. bursting pressure	37.5 bar	543.75 psi	3.75 MPa	
Pressure rating	25 bar	362.5 psi	2.5 MPa	
Electrical data				
Operating voltage [V]	18...32 DC			
Current consumption [mA]	250; (24V)			
Protection class	III			

SMF750

Magnetic-inductive flow meter

SMGX0KGFFRKG/UST

Reverse polarity protection		yes			
Power-on delay time	[s]	< 5			
Measuring principle		magnetic-inductive			
Inputs / outputs					
Total number of inputs and outputs		2			
Inputs					
Inputs		OUT2	external totaliser reset		
Outputs					
Total number of outputs		2			
Output signal		OUT1	pulse signal; totaliser switching signal; diagnostic signal; IO-Link		
		OUT2	analogue signal; pulse signal; totaliser switching signal; diagnostic signal		
Electrical design		PNP/NPN			
Pulse output		flow rate meter			
Short-circuit protection		yes			
Type of short-circuit protection		pulsed			
Overload protection		yes			
Analogue					
Number of analogue outputs		1			
Analogue current output	[mA]	4...20; (skalierbar)			
Max. load	[Ω]	500			
Resolution of analogue output		0.38 µA			
Digital					
Number of digital outputs		2			
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	0...10000			
Measuring/setting range					
Measuring range		50...5000 l/min	3...300 m³/h	13.2...1321 gpm	0.33...32.8 ft/s
Note on factory setting		0...70,0 m³/h			
Analogue start point ASP		-5000...4000 l/min	-300...240 m³/h	-1321...1056.8 gpm	-32.8...26.24 ft/s
Analogue end point AEP		-4000...5000 l/min	-240...300 m³/h	-1056.8...1321 gpm	-26.24...32.8 ft/s
Low flow cut-off LFC		0...4000 l/min	0...240 m³/h	0...1056.8 gpm	0...26.24 ft/s
Pulse length	[s]	0.00005...2			
Pulse value		0.001...99990000 l			
Temperature monitoring					
Measuring range		-20...150 °C		-4...302 °F	
Analogue start point		-20...116 °C		-4...240.8 °F	
Analogue end point		14...150 °C		57.2...302 °F	
Conductivity monitoring					
Measuring range	[µS/cm]	100...100000			

SMF750

Magnetic-inductive flow meter

SMGX0KGFFRKG/UST

Analogue start point	[µS/cm]	0...80000	
Analogue end point	[µS/cm]	20000...100000	
Accuracy / deviations			
Volumetric flow monitoring			
Accuracy (under reference conditions)		with optional factory calibration (availability is being planned)	± (0,2 % MW + 2 mm/s)
		standard	± (0,5 % MW + 1,5 mm/s)
Repeatability		0,1% MW	
Temperature monitoring			
Accuracy	[K]	± 1	
Repeatability	[K]	± 0,5	
Conductivity monitoring			
Accuracy (in the measuring range)		in the range of 100...20000 µS/cm	±10% MW
		in the range of 20000...100000 µS/cm	±20% MW
Repeatability		± 5% MW	
Response times			
Volumetric flow monitoring			
Response time	[s]	< 0.3	
Damping process value dAP	[s]	0...5	
Temperature monitoring			
Response time	[s]	< 3; (flow velocity: ≥ 0,5m/s)	
Conductivity monitoring			
Response time	[s]	< 2	
Software / programming			
Diagnostic functions		direction of flow detection; liquid detection	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM3 (230,4 kBaud)	
IO-Link revision		1.1.3	
SDCI standard		IEC 61131-9	
Profiles		Common - I&D	Identification and Diagnosis
		Smart Sensor - SSP 4.3.4	Measuring and Switching Sensor, floating point, 4 channel
SIO mode		yes	
Required master port type		A	
Process data analogue		6	
Process data binary		8	
Min. process cycle time	[ms]	1.9	
IO-Link process data (cyclical)		**function**	**bit length**
		totaliser	32
		flow	32
		temperature	32
		conductivity	32
		status	4
		binary switching information	8

SMF750

Magnetic-inductive flow meter

SMGX0KGFFRKG/UST

IO-Link functions (acyclical)		direction of flow detection; totaliser; memory; operating hours counter; internal temperature; simulation function	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	1803
Operating conditions			
Ambient temperature		-20...65 °C	-4...149 °F
Storage temperature		-20...80 °C	-4...176 °F
Protection		IP 67; IP 69	
Tests / approvals			
EMC		DIN 61326-1	
Shock resistance		DIN IEC 68-2-27	20 g (18ms)
Vibration resistance		DIN IEC 68-2-6	5 g (10...2000Hz)
MTTF	[years]	82	
UL approval		UL approval no.	I032
Pressure Equipment Directive		Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight	[g]	8818.2	
Inlet pipe length		5 x DN	
Outlet pipe length		2 x DN	
Materials		housing: stainless steel (316L/1.4404); flange: stainless steel (304/1.4301); electronics fixture: stainless steel (304/1.4301); electronics: stainless steel (316L/1.4404); LED ring: PP	
Materials (wetted parts)		Pipe section: PFA; electrodes: stainless steel (316L/1.4435)	
Nominal diameter		DN100 (4“)	
Process connection		ifm-specific device flange	
Surface characteristics Ra/Rz of the wetted parts		≤ 0.4 µm	
Displays / operating elements			
Display		operating status	LED ring, three-colour
Factory setting		m³/h; °C; µS/cm	
Remarks			
Remarks		MW = measured value	
		MEW = Final value of the measuring range	
		pulse and totaliser signal are only available for one of the two outputs	
		reference conditions (1/2): water (free of gas bubbles), 15...35 °C, process connection: DIN32676 series A, pipe standard suitable for process connection	
		reference conditions (2/2): inlet pipe length 10xDN, outlet pipe length 5xDN, device settling time: 30 minutes, device orientation: horizontal, display orientation: up	
Pack quantity		1 pcs.	


SMF750

Magnetic-inductive flow meter


SMGX0KGFFRKG/UST

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

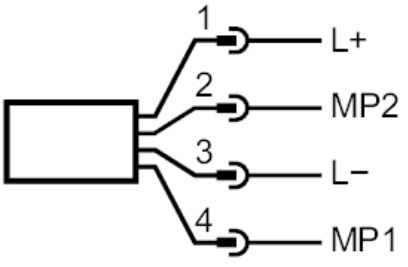

Electrical connection - plug

1	L+	
2	OUT2	MP2, DO, AO, reset
3	L-	
4	OUT1	MP1, DO, IO-Link

AO: analogue output; DO: digital output; MP: multi-function connection