CFEAPULL - Emergency assist alarm pull cord unit

Device overview and specification

The CFEAPULL Pull Cord Unit forms part of the CFEAUPULLKIT Emergency Assist Alarm System.

Operating voltage	12V dc (nominal)
Construction	PC
Dimensions (mm)	H 87 x W 87 x D 30.5 (+cord)

Note: Unit fits on to standard single gang back box



Extra low voltage (ELV) wiring

Always segregate low voltage wiring from the mains wiring.


System requires minimum 2 core 0.4mm^2 cable.

It should be noted that the wiring order of the various system components can be changed to suit a specific application and/or to reduce wiring runs.

All wall-mounting devices should be mounted onto a back box of the required depth.

Wiring guide using 2 core cable

Out	In
PSU 12V supply	Over door indicator
Over door indicator	Cancel unit
Cancel unit	Pull cored unit

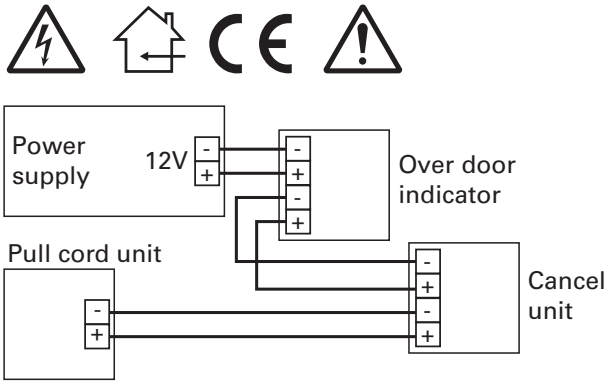

Powering Business Worldwide

Eaton Electrical Systems Ltd
Wheatley Hall Road
Doncaster
South Yorkshire
DN2 4NB

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

© 2018 Eaton
All Rights Reserved
Publication No. TD450146EN / CSSC-1523
Version 1, August 2018

Eaton is a registered trademark.

All other trademarks are property of their respective owners.