ATWPH.CK - PROTWIST® SHOCK screwdrivers for Phillips® screws



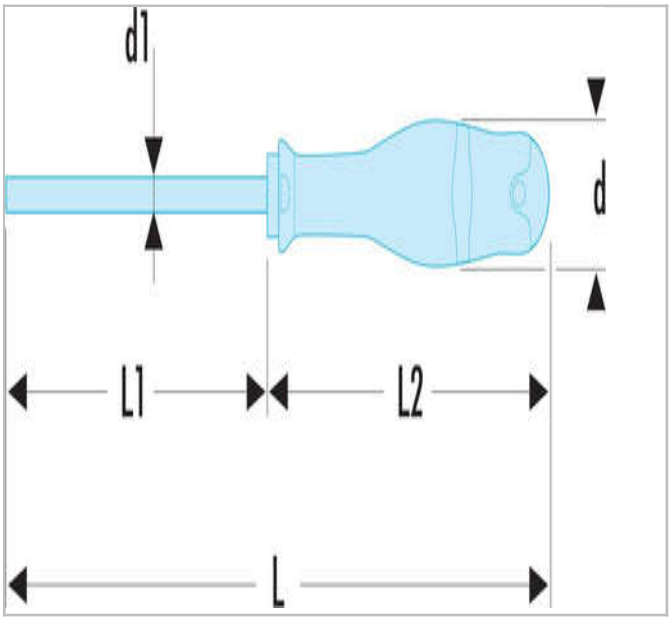

Standards:

NF ISO 8764-1, NF ISO 8764-2, ISO 8764-1, ISO 8764-2, DIN ISO 8764-1, DIN ISO 8764-2, ASME B107.600

Description:

- Impact Zone with Steel Strike - hexagonal blade with 73MO steel.
- Hexagonal blade with shoulder to take a wrench.
- Extra-long blade for use in confined spaces.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Golden electroplated Tip - 4x Corrosion Resistance.
- Handle ‘Channel’ - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

© FACOM 2020

	Diameter [mm]	Diameter D1 [mm]	Length L1 [mm]	Length L [mm]	Length L2 [mm]	Weight [g]	Phillips Tip Number ["]
ATWPH1X100CK	30.0	5.0	100.0	209.0	109.0	70.0	PH1
ATWPH2X125CK	36.0	6.0	125.0	245.0	120.0	130.0	PH2
ATWPH3X150CK	40.0	8.0	150.0	275.0	125.0	200.0	PH3

© FACOM 2020