Adapter to OGN, OGN-SMD

Fuse Carriage with Handle for OGN, OGN-SMD

new



2.5W/10A

Description
- Better access to fuse-links on PCB's

Applications
- Printed circuit boards with tightly packed components. Colour coding allows for quick and safe replacement of fuses.

References
Mating adapter to OGN; OGN-SMD


Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product

Technical Data

Fuse-Link	5 x 20 mm
Rated Power Acceptance IEC	2.5 W / 10 A @ Ta 23 °C
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cover	Thermoplastic black / white UL 94V-0
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Contact Resistance	< mΩ at 20 mV

Dimension

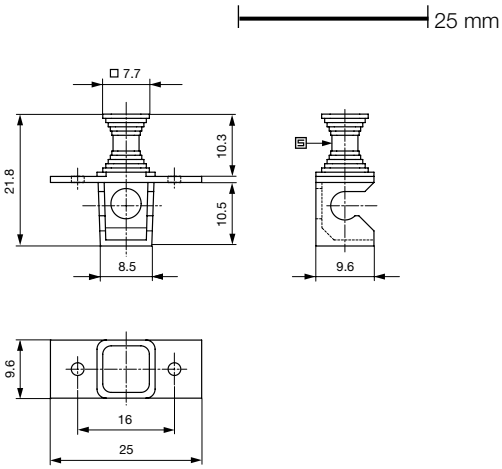

Packaging Unit
Bulk (100 pcs.)

08.06.2015

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.