

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	01OCT2015	DMS/YGC	PRN: P2015-1992

SOUTHCO PERFORMANCE GUIDELINES


THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

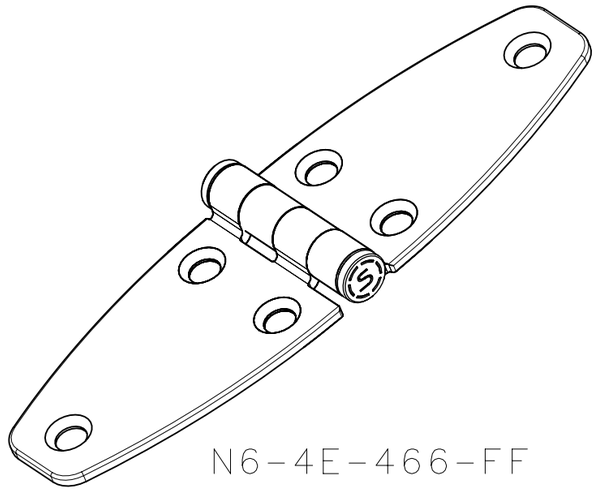


N6-4E-466-FF

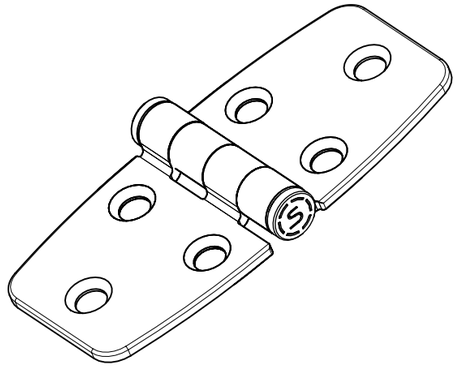

N6-4E-444-FF



N6-4E-422-FF

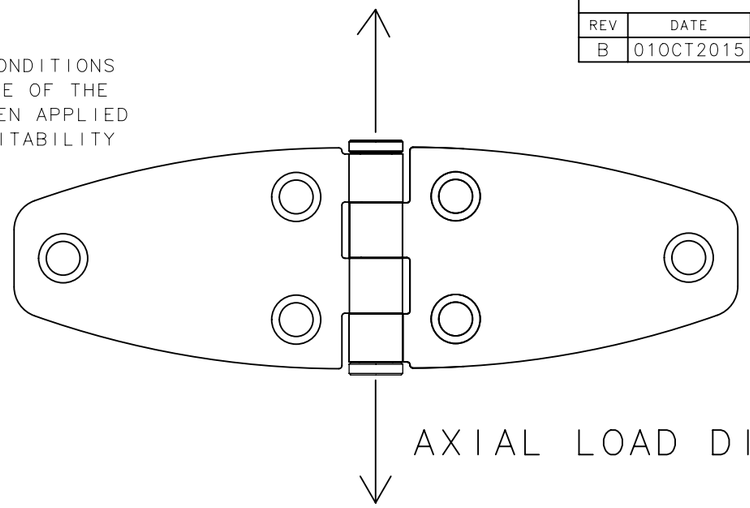

	MAX STATIC WORKING LOAD, AXIAL	MAX STATIC WORKING LOAD, RADIAL
N6-4E-4XY-FF	534 N (120 lbf)	534 N (120 lbf)

REF: trN6-19542

SURFACE AREA	THIRD ANGLE PROJECTION	southco® CONNECT·CREATE·INNOVATE
VOLUME	MILLIMETERS [IN]	DESCRIPTION: FREE SWINGING HINGE
PROPRIETARY ITEM: EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	TOLERANCES UNLESS OTHERWISE NOTED: ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.	SIZE: A3 · SYSTEM: NX · DWG NO.: TD-N6-4E
	PER ASME Y14.5M-1994	DRAWN BY: ASM · DATE: 18SEP2014 · SCALE: 1:1 · SHEET: 1 OF 1