G3VM-21GR□/41GR4/41GR5/41GR6/81GR□

MOS FET Relays SOP 4-pin, Low-output-capacitance and Low-ON-resistance Type (with Low C × R)

MOS FET Relays in SOP 4-pin packages that achieve a low C × R

- **Load voltage: 20 V, 40 V, or 80 V**
- **G3VM-21GR: Low C × R = 5 pF·Ω, COFF (standard) = 1 pF, RON (standard) = 5 Ω**
- **G3VM-21GR1: Low C × R = 5 pF·Ω, COFF (standard) = 5 pF, RON (standard) = 1 Ω**
- **G3VM-41GR6: Low C × R = 10 pF·Ω, COFF (standard) = 1 pF, RON (standard) = 10 Ω**
- **G3VM-41GR4: Low C × R = 10 pF·Ω, COFF (standard) = 5 pF, RON (standard) = 2 Ω**
- **G3VM-41GR5: Low C × R = 10 pF·Ω, COFF (standard) = 10 pF, RON (standard) = 1 Ω**



Note: The actual product is marked differently from the image shown here.

RoHS Compliant

■Application Examples

- **Semiconductor test equipment**
- **Test & Measurement equipment**
- **Communication equipment**
- **Security equipment**
- **Industrial equipment**
- **Power circuit**
- **Amusement equipment**

■Package (Unit : mm, Average)

SOP 4-pin



Note: The actual product is marked differently from the image shown here.

■Model Number Legend

G3VM-□ □ □ □ □
1 2 3 4 5

1. Load Voltage
2 : 20 V
4 : 40 V
8 : 80 V

2. Contact form
1 : 1a (SPST-NO)

3. Package
G : SOP 4-pin

4. Additional functions
R: Low ON resistance

5. Other informations
When specifications overlap, serial code is added in the recorded order.

■Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) ✻	Continuous load current (peak value) ✻	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
SOP4	1a (SPST-NO)	Surface-mounting Terminals	20 V	160 mA	G3VM-21GR	100 pcs.	G3VM-21GR(TR)	2,500 pcs.
				300 mA	G3VM-21GR1		G3VM-21GR1(TR)	
			40 V	120 mA	G3VM-41GR6		G3VM-41GR6(TR)	
				250 mA	G3VM-41GR4		G3VM-41GR4(TR)	
				300 mA	G3VM-41GR5		G3VM-41GR5(TR)	
			80 V	40 mA	G3VM-81GR		G3VM-81GR(TR)	
				200 mA	G3VM-81GR1		G3VM-81GR1(TR)	

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

■Absolute Maximum Ratings (Ta = 25°C)

	Item	Symbol	G3VM-21GR	G3VM-21GR1	G3VM-41GR6	G3VM-41GR4	G3VM-41GR5	G3VM-81GR	G3VM-81GR1	Unit	Measurement conditions
Input	LED forward current	IF	50							mA	
	LED forward current reduction rate	ΔIF/°C	-0.5							mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	5							V	
	Connection temperature	TJ	125							°C	
Output	Load voltage (AC peak/DC)	VOFF	20		40			80		V	
	Continuous load current (AC peak/DC)	Io	160	300	120	250	300	40	200	mA	
	ON current reduction rate	ΔIo/°C	-1.6	-3.0	-1.2	-2.5	-3.0	-0.4	-2.0	mA/°C	Ta ≥ 25°C
	Pulse ON current	Iop	480	900	360	750	900	120	600	mA	t=100 ms, Duty=1/10
	Connection temperature	TJ	125							°C	
Dielectric strength between I/O ✻		VI-O	1500							Vrms	AC for 1 min
Ambient operating temperature		Ta	-20 to +85							°C	With no icing or condensation
Ambient storage temperature		Tstg	-40 to +125		-55 to +125		-40 to +125			°C	
Soldering temperature		–	260							°C	10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-21GR	G3VM-21GR1	G3VM-41GR6	G3VM-41GR4	G3VM-41GR5	G3VM-81GR	G3VM-81GR1	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.0							V	I_F=10 mA
			Typical	1.15								
			Maximum	1.3								
	Reverse current	I_R	Maximum	10							μA	V_R=5 V
	Capacitance between terminals	C_T	Typical	15							pF	V=0, f=1 MHz
	Trigger LED forward current	I_{FT}	Maximum	4					3		mA	G3VM-21GR/21GR1/41GR4/41GR5/41GR6 : I_O=100 mA G3VM-81GR : I_O=40 mA G3VM-81GR1 : I_O=200 mA
	Release LED forward current	I_{FC}	Minimum	0.2					0.1		mA	I_{OFF}=10μA
Output	Maximum resistance with output ON	R_{ON}	Typical	5	1	10	2	1	16	5	Ω	G3VM-21GR/21GR1/41GR4/41GR5/41GR6 : I_F=5 mA, I_O=Continuous load current ratings, t<1s G3VM-81GR/81GR1 : I_F=5 mA, I_O=Continuous load current ratings
			Maximum	8	1.5	15	3	1.5	25	8		
	Current leakage when the relay is open	I_{LEAK}	Maximum	1							nA	G3VM-21GR/21GR1 : V_{OFF}=20 V, Ta=50°C G3VM-41GR4/41GR5/41GR6 : V_{OFF}=30 V, Ta=50°C G3VM-81GR : V_{OFF}=80 V, Ta=60°C G3VM-81GR1 : V_{OFF}=80 V, Ta=50°C
	Capacitance between terminals	C_{OFF}	Typical	1	5	1	5	10	2.5	6.5	pF	G3VM-21GR/21GR1/41GR4/41GR5/41GR6 : V=0, f=100 MHz, t<1 s G3VM-81GR/81GR1 : V=0, f=100 MHz, t<10 s
			Maximum	2.5	12	2	7	14	3.5	11		
Capacitance between I/O terminals		C_{I-O}	Typical	0.8					0.7		pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals		R_{I-O}	Minimum	1000							MΩ	V_{I-O}=500 VDC, RoH≤60%
			Typical	10^8								
Turn-ON time		t_{ON}	Typical	–					0.07	0.13	ms	G3VM-21GR/21GR1/41GR4/41GR5/41GR6 : I_F=10 mA, R_L=200 Ω, V_{DD}=20 V ✻ G3VM-81GR/81GR1 :I_F=5 mA, R_L=200 Ω, V_{DD}=10 V ✻
			Maximum	0.5								
Turn-OFF time		t_{OFF}	Typical	–					0.07	0.17		
			Maximum	0.5								

✻ Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-21GR	G3VM-21GR1	G3VM-41GR6	G3VM-41GR4	G3VM-41GR5	G3VM-81GR	G3VM-81GR1	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	20		32			64		V
Operating LED forward current	I_F	Minimum	7		10			5		mA
		Maximum	30							
Continuous load current (AC peak/DC)	I_O	Maximum	160	300	120	250	300	40	200	
Ambient operating temperature	Ta	Minimum	-20							°C
		Maximum	60							

■Spacing and Insulation

Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

■Engineering Data

●LED forward current vs. Ambient temperature

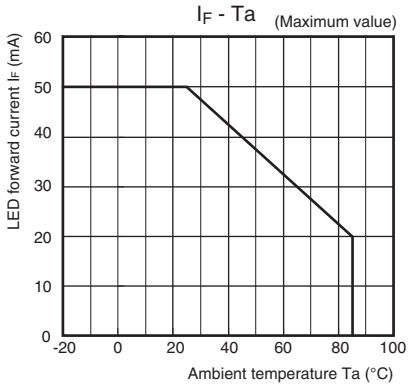

●Continuous load current vs. Ambient temperature

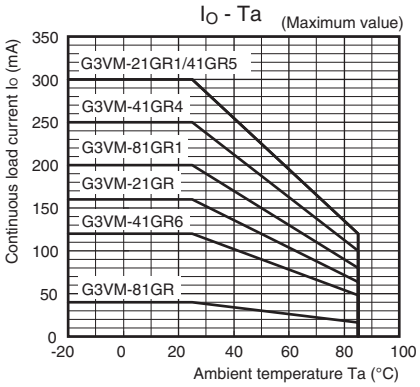

●LED forward current vs. LED forward voltage

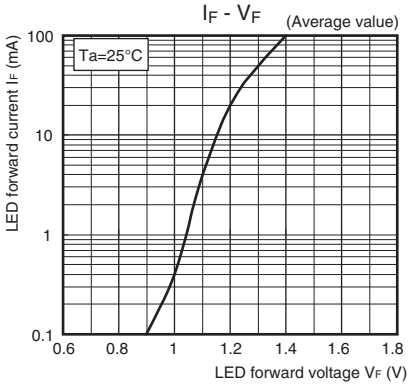

●Continuous load current vs. On-state voltage

G3VM-21GR/21GR1

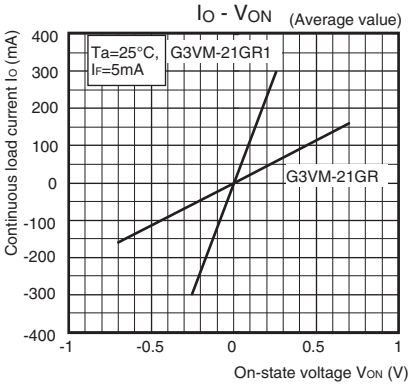

G3VM-41GR6/41GR4/41GR5

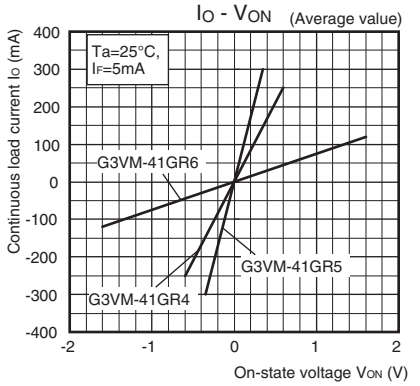

G3VM-81GR/81GR1

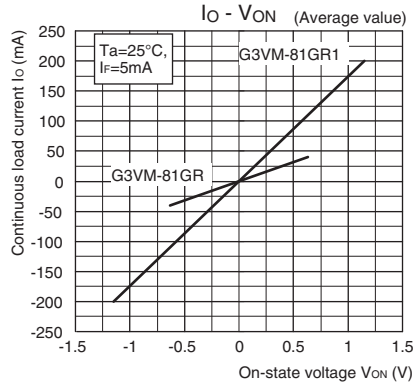

●On-state resistance vs. Ambient temperature

G3VM-21GR/21GR1

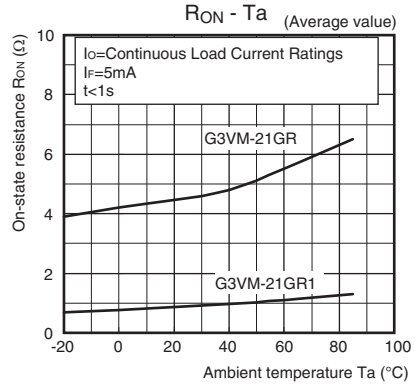

G3VM-41GR6/41GR4/41GR5

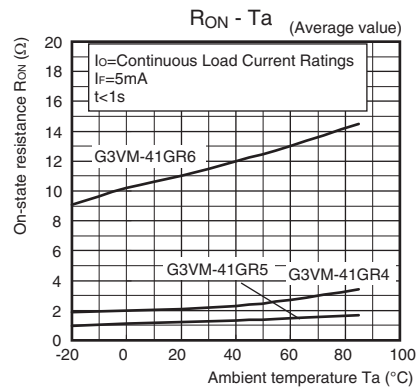

G3VM-81GR/81GR1

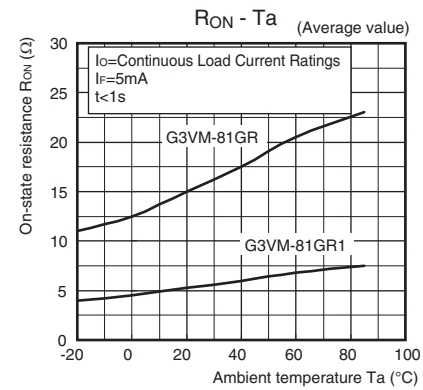

●Trigger LED forward current vs. Ambient temperature

G3VM-21GR/21GR1

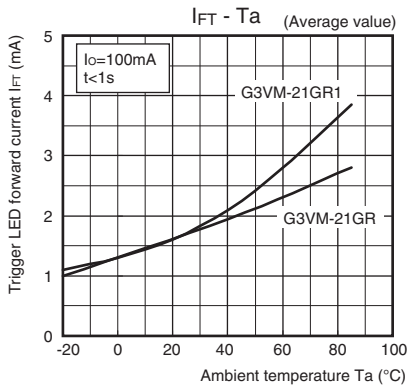

G3VM-41GR6/41GR4/41GR5

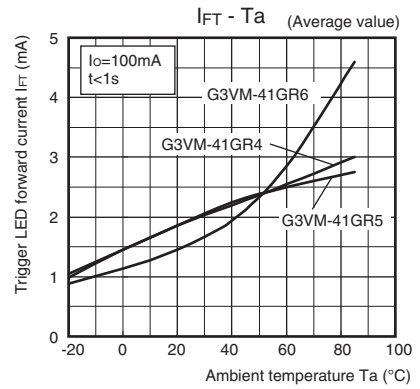

G3VM-81GR/81GR1

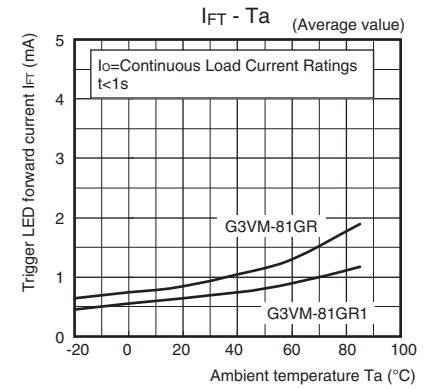

■Engineering Data

●Turn ON, Turn OFF time vs. LED forward current

G3VM-21GR/21GR1

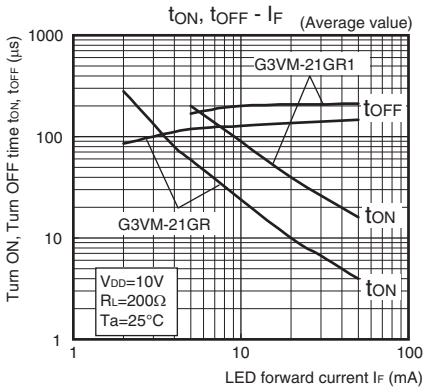

G3VM-41GR6/41GR4/41GR5

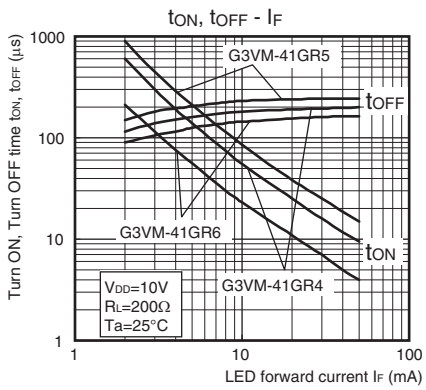

G3VM-81GR/81GR1

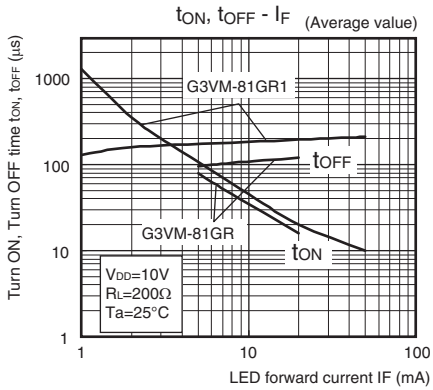

●Turn ON, Turn OFF time vs. Ambient temperature

G3VM-21GR/21GR1

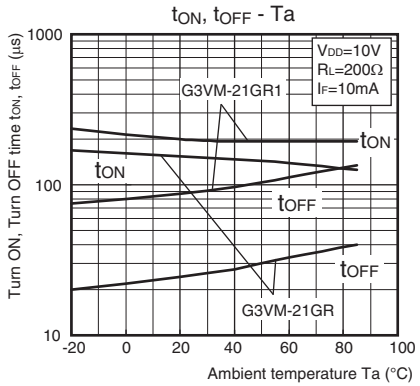

G3VM-41GR6/41GR4/41GR5

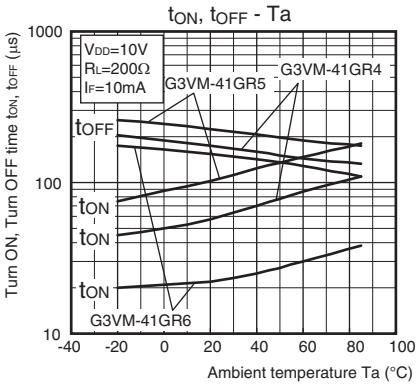

G3VM-81GR/81GR1

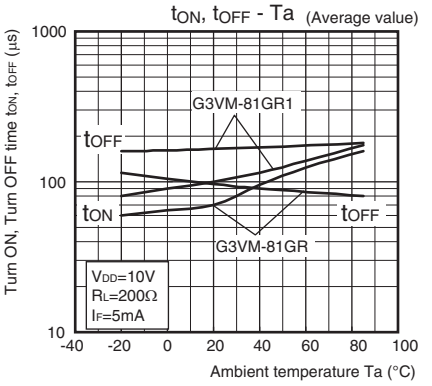

●Current leakage vs. Load voltage

G3VM-21GR/21GR1

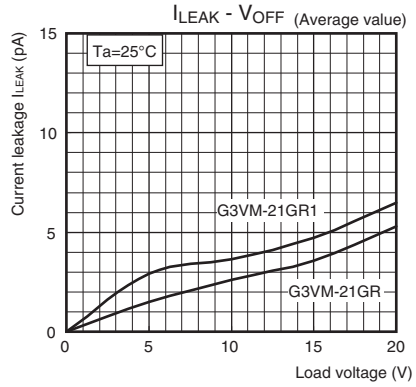

G3VM-41GR6/41GR4/41GR5

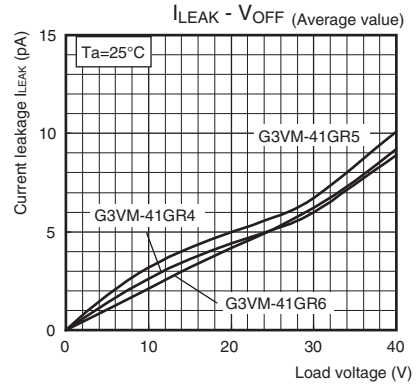

G3VM-81GR/81GR1

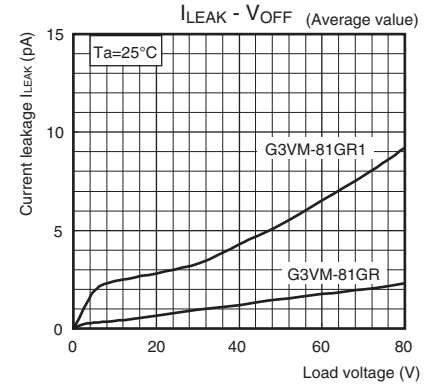

●Output terminal capacitance vs. Load voltage

G3VM-21GR/21GR1

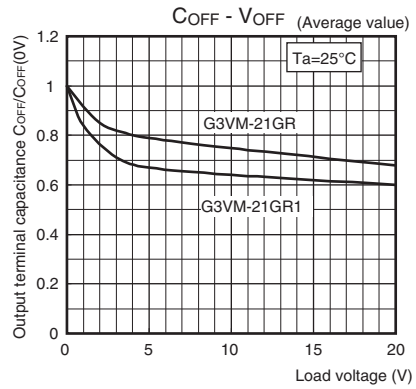

G3VM-41GR6/41GR4/41GR5

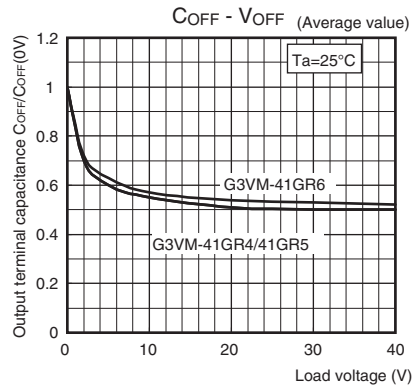

G3VM-81GR/81GR1

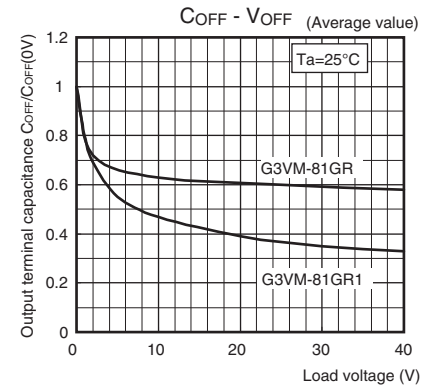

■Appearance / Terminal Arrangement / Internal Connections

●Appearance

SOP (Small Outline Package)

SOP 4-pin

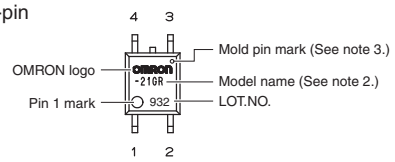

Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)



■Dimensions (Unit: mm)



Surface-mounting Terminals

Weight: 0.1 g

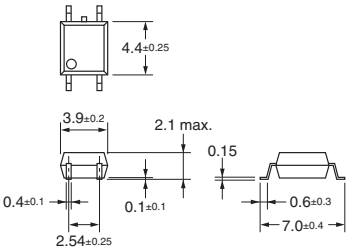

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

■Safety Precautions

• Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact

Americas
https://www.components.omron.com/

Europe
http://components.omron.eu/

Asia-Pacific
https://ecb.omron.com.sg/

China
https://www.ecb.omron.com.cn/

Korea
https://www.omron-ecb.co.kr/

Japan
https://www.omron.co.jp/ecb/

© OMRON Corporation 2018 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K307-E1-01
0318(0318)(O)