MURR ELEKTRONIK
*stay connected*

**MOSA M8 female straight field-wireable (IDC) Slimline, 3p, 0,14-0,34qmm**

Female straight
3-pole
Insulation displacement technology
Connection cross section: 0.14...0.34 mm²

## Image




Vicarious picture

| | |
|---|---|
| **Form** | |
| | 08371 |
| **Technical Data** | |
| Operating voltage | max. 32 V AC/DC |
| Operating current per contact | max. 4 A |
| Connection cross section | 0.14...0.34 mm² (conductor diameter min. 0.1 mm) |
| Sealing range (cable diameter) | 2.5...5.1 mm (gasket included) |
| Wire isolation | PVC, PP, TPE |
| Outer wire diameter | 1.0...1.6 mm |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C |
| **Commercial data** | |
| Net weight | 15 |
| Weight unit | Gram |
| Basic unit | pc. |
| Customs tariff number | 85369010 |
| Unit (piece) | 1 |
| Minimum order quantity (piece) | 1 |


All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14

stay connected

## Contact layout

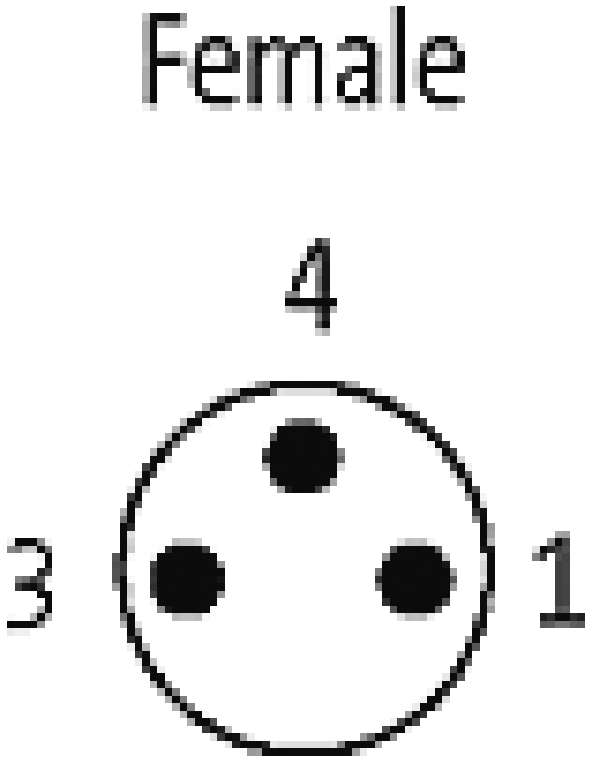



## Circuit diagram

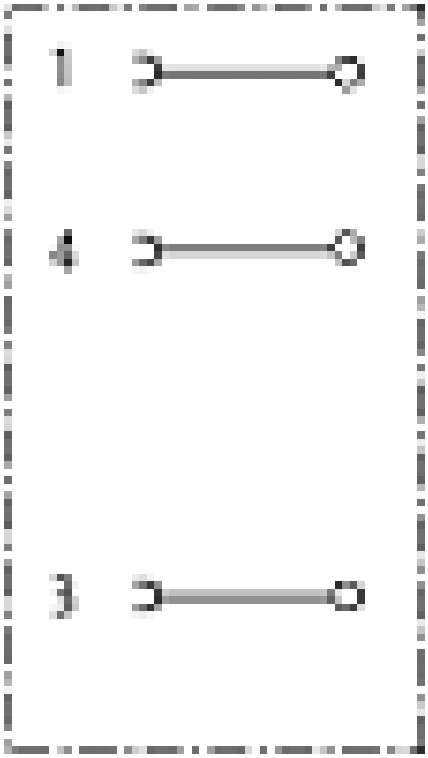


All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14

stay connected

## Dimension drawing

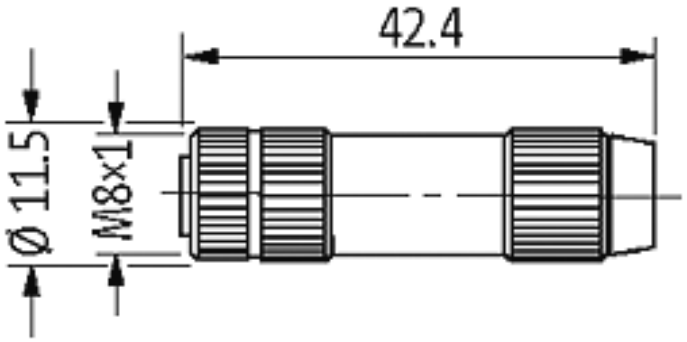


All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 01/14