multimec® 3F/4F WA/1WD/1WP


Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115°C
  high temp: -40/+160°C




Keycaps in frosted white shown on this page can also be used on **illumec™ switch 4F**


Dimensions (through-hole) 3F 1WA

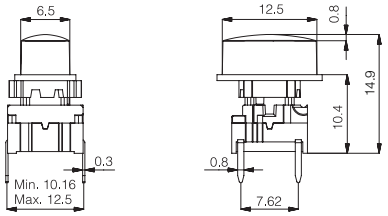


PCB layout

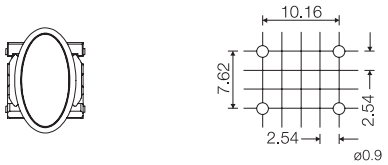


Dimensions (w/LED) 3F 1WD

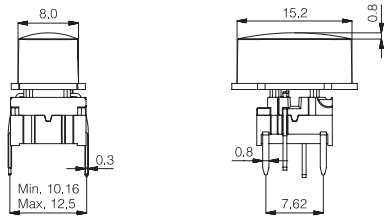


PCB layout
(top view)

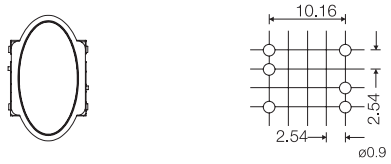


Dimensions (SMD) 3F 1WP

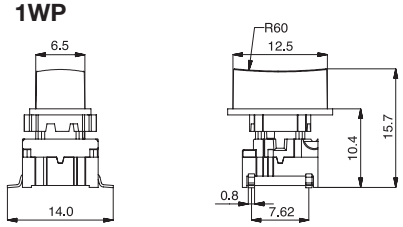

PCB layout

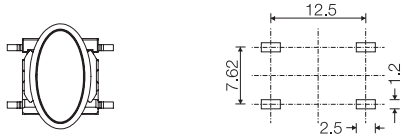

8 different position options



How to order

3 F						
Switch	**Mounting** **T** through-hole **S** surface mount	**L 6** low temp. **H 9** high temp.	+	**Cap** **1WA** **1WD** **1WP**	**00** blue **03** grey **08** red **09** black **30** ultra blue **40** pigeon blue **42** aqua blue **53** metal light grey **57** metal dark grey

3 F						
Switch	**Mounting** **T** through-hole	**L 6** low temp. **H 9** high temp.	**LED** **24** green **45** yellow **89** red	+	**Cap** **1WA** **1WD** **1WP**	**16** frosted white

Ordering example: 3FTL6 + 1WA09 or 3FTL689 + 1WP16

For updates of products and/or changes of specifications please see **www.mec.dk**