

PRIMEX
ABRASIVES' SIGNATURE

NYLONFLEX

Flexible

APPLICATIONS



- Can be used wet or dry with any type of degreaser.
- Very efficient for the narrowest and most difficult to reach areas.
- Recommended for edges scuffing before painting.


2 colors / 2 use :

- **red:** very fine grit (aluminium oxide). For surface preparation, for new parts.
- **grey:** ultra fine grit (silicon carbide). To prepare before touching up the paintwork.

AVAILABLE SHAPES



Rolls

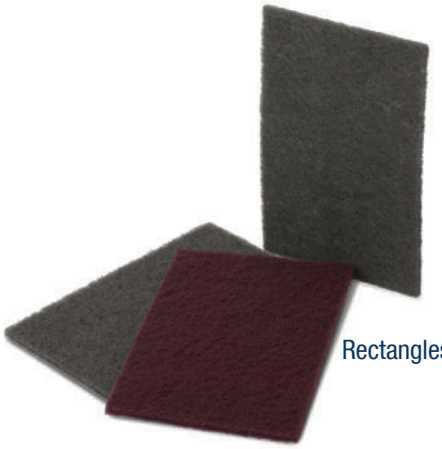

Rectangles

TECHNICAL DATA

Red Nylonflex:

- Composition: **nylon fiber, resin, aluminium oxide grain and alumino-silicate**
- Grain size: **very fine A**
- Weight: **630 g/m²**
- Thickness: **9 mm**

Grey Nylonflex:

- Composition: **fibre nylon, résine, grain carbure de silicium**
- Grain size: **ultra fine S**
- Weight: : **390 g/m²**
- Thickness: **9 mm**

© Prémines Industries - update : May 2023