
87045 LIMOGES Cedex
Telephone: (+33) 05 55 06 87 87 - Fax: (+33) 05 55 06 88 88

Mosaic™

Cat. No.(s): 787 38 - 792 38

8-contact telephone socket



1. TECHNICAL CHARACTERISTICS

Telephone socket fitted with an 8-terminal contact switch.
Accepts either 6- or 8-terminal plugs (plug Cat. No. 512 38 for example).
Complies with France Telecom technical specifications No. ST - PAA - TPA - PRI 537
Accepts plugs complying with France Telecom technical specifications ST - PAA -
TPA - PRI 537

2. MOUNTING


Direct mounting by clipping on:
- Legrand Mosaic support frames
- Legrand Batik flush-mounting boxes
- Legrand DLP columns and conduits
- Legrand Mosaic plates

Mounting possible with adaptor 50 x 50 Cat. No. 748 62 in place of an old Mosaic.

3. MATERIAL CHARACTERISTICS

White polycarbonate RAL 9010
Self-extinguishing: 750 ° C / 5 sec.
Resistance to fire V0 according to UL 94

4. DIMENSIONS

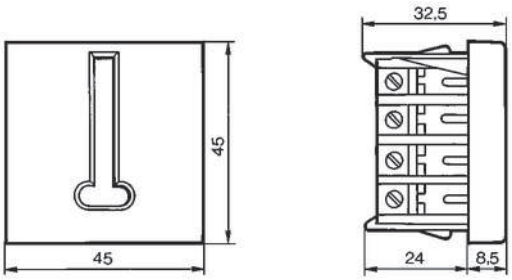



5. INSTALLATION

France Telecom authorization for use
- Not allowed on claw-mounted support frame.
- For safety reasons, installing a telephone socket and a power socket inside the same box is prohibited.

France Telecom recommendations
- Make provision for two sockets, one of them being located close to a power socket.
- Install sockets at a height of 8 to 25 cm above ground level.
- The internal installation must be ISDN (Numeris) compatible.

1er cas :

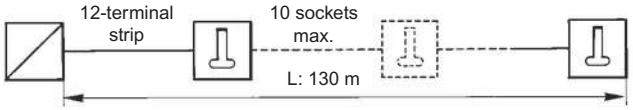


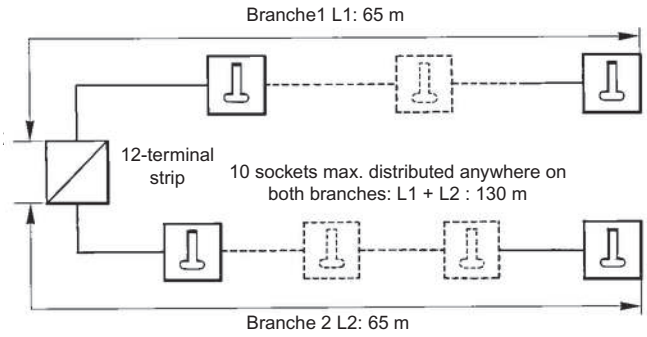

8-contact telephone socket

6. WIRING

6.1 Wiring of sockets

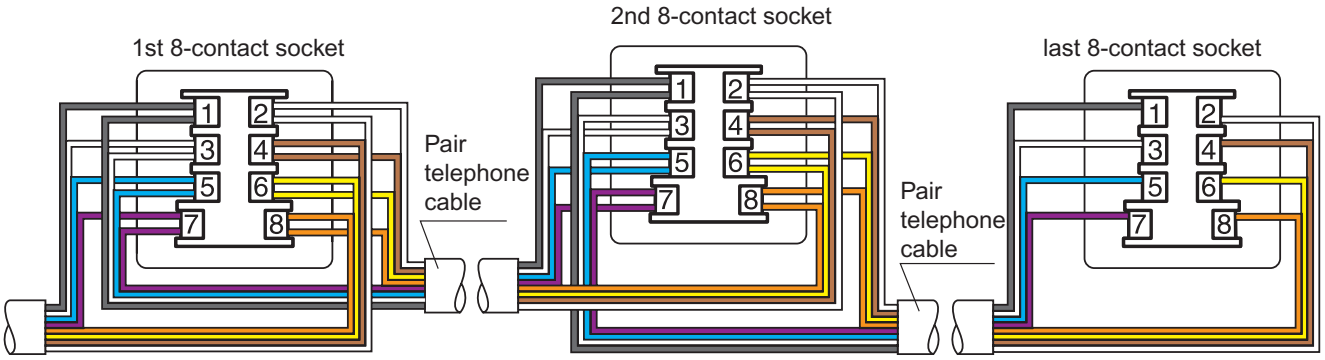

Connect the sockets in parallel: all wires must be connected.
Use France Telecom approved cable, 4 pairs, Ø 0.6 mm, type 278-4.6.
Follow contact numbers and wire colours.

