HIRSCHMANN® Test & Measurement
A BRAND OF SKS

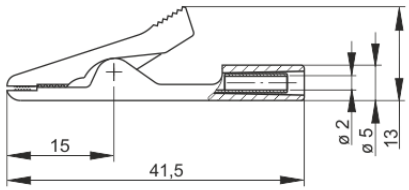
SKS Kontakttechnik GmbH

Crocodile clips

MA 1 S



CE

Product	MA 1 S
description	Miniature alligator clip with high strength insulation, tin-plated brass/bronze jaws and stainless steel spring. The flat part of the jaws (fine wire section) allows a secure contact to be made when clamping even the thinnest wires. Capable of clamping flat components (soldering eyes) and wires up to a maximum diameter of 4 mm.
operating instruction	BA210
article-no. / *colour	9735841xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 06 gray · 07 white Sn
drawing	
	
technical data	
connection	2 mm socket
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	8 A
material socket	bronze, tin plated
housing material	PP
temperature range acc. To IEC61010(1)	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamping range	4 mm

(1) contact the manufacturer for applications at deviating temperature ranges

2 mm system

[2] without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022