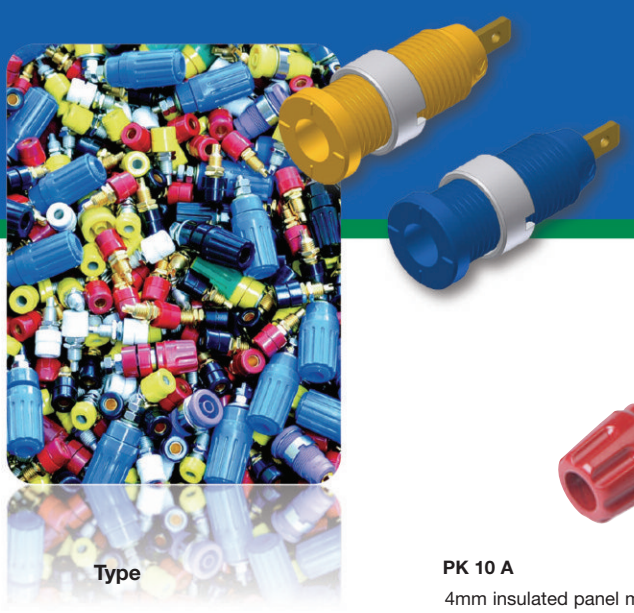

Test Jacks
4 mm System

Type	PK 10 A	PKN 10 B
		
	4mm insulated panel mount binding post with 2mm cross hole, nickel plated brass, M4 thread terminal	4mm insulated panel mount binding post with 2.6mm cross hole, nickel plated brass, M6 thread terminal
Pin Diameter	4 mm	4 mm
PART NO. / Housing color	● **930099100** ● **930099101** ● **930099102** ● **930099103** ● **930099104** ● **930099188**	● **930117100** ● **930117101**

Technical Data		
Contact Type	jack Ø 4 mm, cross hole Ø 2 mm	jack Ø 4 mm, cross hole Ø 2,6 mm
Connection Type	M 4 thread terminal	M6 thread, solder terminal
Voltage Rating	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurement Category (IEC61010)	CAT I	CAT I
Current Rating*	16 A	63 A
Contact Resistance	2 mOhm	2 mOhm
Mounting Type	screw thread M4	screw thread M6
Material Specifications		
Jack Body	nickel plated brass	brass
Contact Spring	nickel	nickel plated nickel
Housing	PF	PF
Environmental Conditions		
Temperature Range	-25°C to +100 °C (-13 to 212°F)	-25°C to +100 °C (-13 to 212°F)
Flamability Rating		
Housing	–	UL 94 HB

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

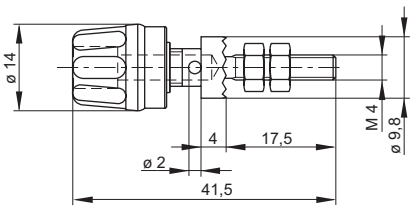

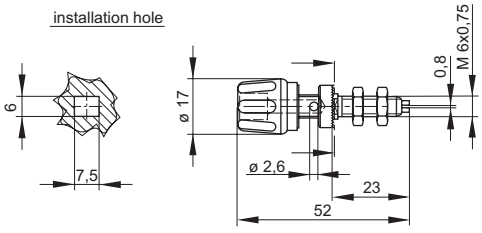

* Please consider derating graph on page 80.