

Model Number


V3-WM-5M-PVC

Cable socket, M8, 3-pole, PVC cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Suitable for 2- and 3-wire technology


Dimensions

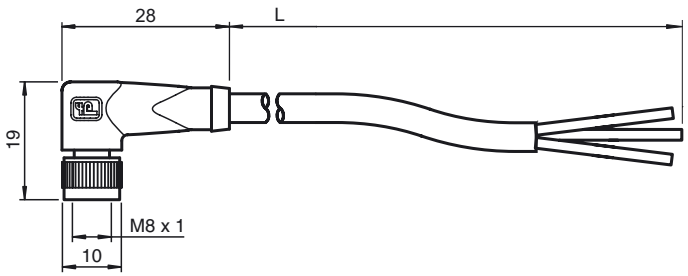

Technical data

General specifications		
Number of poles		3
Connection 1		Connector, female
Construction type 1		angled
Threading 1		M8
Connection 2		free cable end
Electrical specifications		
Operating voltage	U_B	max. 60 V DC
Test voltage		> 1500 V_{eff} AC
Operating current		max. 4 A
Volume resistance		< 5 mΩ
Ambient conditions		
Ambient temperature		-25 ... 100 °C (248 ... 373 K) for temperatures over 80 °C (353 K) reduced elongation at tear
Degree of soiling		3
Mechanical specifications		
Contact elements		spring-loaded contact socket
pin diameter		1 mm
Protection degree		IP67
Material		
Contacts		CuSn / Au
Contact surface		Au
Handle		TPU, green
Cable		PVC
Slotted nut		diecast zinc
Core isolation		PVC
Cable		fine-strand, flexible
Sheath diameter		Ø4.8 mm
Bend radius		> 10 x cable diameter, appropriate for conveyor chains
Colour		grey
Cores		3 x 0.34 mm^2
Conductor construction		19 x 0.15 mm Ø
Length	L	5 m
Flammability		
Contact material		94 V-2
Housing		94 V-2

Electrical connection 1



Release date: 2009-07-02 12:46 Date of issue: 2009-07-02 109026_ENG.xml

Subject to reasonable modifications due to technical advances.
Copyright Pepperl+Fuchs, Printed in Germany