


Test Jacks
4 mm System




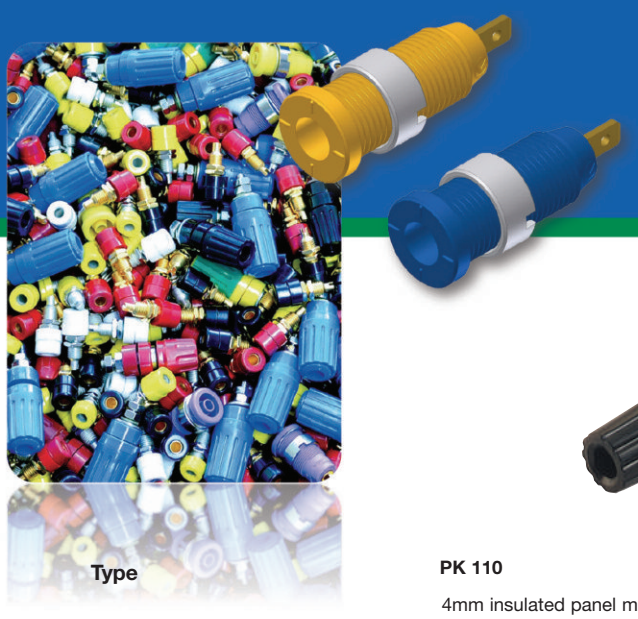


Type	PK 110	PKI 110
	4mm insulated panel mount binding post with 2mm cross hole, nickel plated brass M4 thread terminal.	4mm insulated panel mount binding post with 2mm cross hole, nickel plated brass, M4 thread terminal, max. panel thickness 3.5mm.
Pin Diameter	4 mm	4 mm
PART NO. / Housing color	● **931713100** ● **931713101**	● **931714100** ● **931714101** ● **931714102** ● **931714103** ● **931714104** ● **931714188**
Technical Data		
Contact Type	jack Ø 4 mm, cross hole Ø 2 mm	jack Ø 4 mm, cross hole Ø 2 mm
Connection Type	M4 thread terminal	M4 thread terminal
Voltage Rating	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurement Category (IEC61010)	CAT I	CAT I
Current Rating*	35 A	35 A
Contact Resistance	2 mOhm	2 mOhm
Mounting Type	screw thread M4	screw thread M4
Material Specifications		
Jack Body	nickel plated brass	nickel plated brass
Contact Spring	–	–
Housing	Polyamide	Polyamide
Environmental Conditions		
Temperature Range	-25°C to +100 °C (-13 to 212°F)	-25°C to +100 °C (-13 to 212°F)
Flamability Rating		
Housing	UL 94 V-2	UL 94 V-2

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

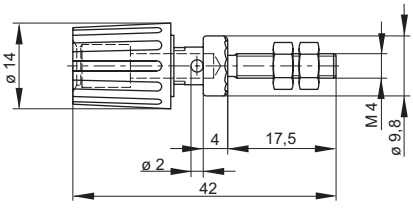

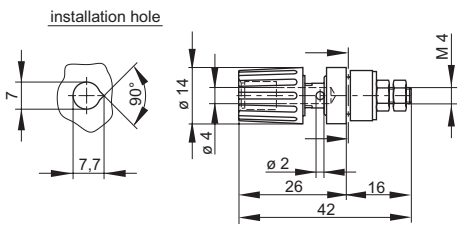

* Please consider derating graph on page 80.