HIRSCHMANN® Test & Measurement
A BRAND OF SKS

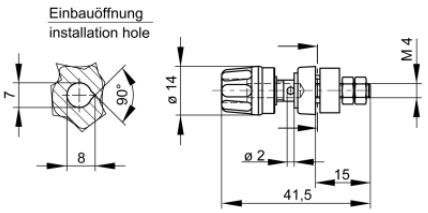
SKS Kontakttechnik GmbH

Sockets

PKI 10 A



CE

Product	PKI 10 A
description	Pole terminal with claw edge and captive insulated head and insulated ring. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For insulated, non-rotating installation in equipment chassis and switchpanels with a wall thickness up to 2 mm.
operating instruction	BA402
article-no. / *colour	9301031xx 00 black, 01 red, 02 blue, 03 yellow, 04 green, 05 brown, 06 gray, 07 white, 09 violet, 88 yellow green Ni
drawing	
	
technical data	
connection	M4 thread
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	35 A
material socket	brass, nickel plated
housing material	PF
temperature range acc. To IEC61010(2)	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

4 mm system

[1] for normal environmental conditions -5°C to +40°C
[2] contact the manufacturer for applications at deviating temperature ranges
[3] without rated measurement category, for other circuits that are not directly connected to mains
stand: 15.06.2021