
DATASHEET

# C4AD05UXXX

**(M12 Cordset, 4 Position, 22 AWG Shielded, Male Straight to Female Right Angle)**



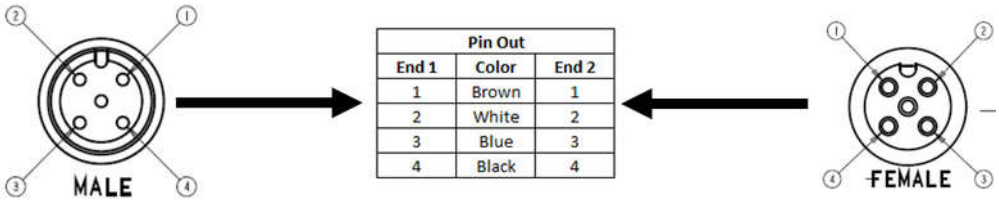


| Pin Out | | |
|---|---|---|
| End 1 | Color | End 2 |
| 1 | Brown | 1 |
| 2 | White | 2 |
| 3 | Blue | 3 |
| 4 | Black | 4 |

- Mueller's C4AD05UXXX is an M12 4-pin double ended, shielded instrumentation cable with a straight male connector on one end and a right angle female connector on the other.
- Keyway – A Coding
- Utilizes a 4-conductor 22 AWG PVC-insulated, shielded cable.
- Ratings:
  - Current: 4 A
  - Voltage: 250 V AC/DC
- Material:
  - Coupling Nuts – Nickel Plated Brass
  - Pins/Contacts – Gold Plated Brass
- Length: The "U" in the model number represents unit of measurement. Either: Meters (M), Feet (F)
- Length: The "XXX" in the model number represents length. Standard lengths are 2, 5, and 10 meters. Any other lengths available upon request.
- Meets Standard: IEC 61076-2-101
- Protection Class: IEC IP68
- RoHS 3 Compliant

Mueller Electric Company
2850 Gilchrist Rd. Bld 5A
Akron, OH 44305

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524