
HR5XS22

Socket for relay for fitting on DIN rail or screws, screw terminals



Product designation		SOCKET
Product type designation		HR5X
Contact characteristics		
Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage Uimp	kV	4
Mechanical features		
Fixing		On 35mm DIN rail and with screw

Dimensions

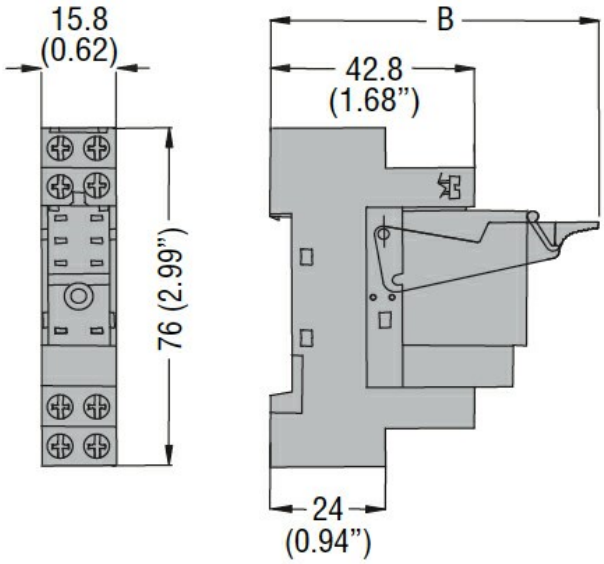


B: 72.5mm (2.85") con HR3X88
82.5mm (3.25) con XR5X88

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

HR5XS22

Socket for relay for fitting on DIN rail or screws, screw terminals

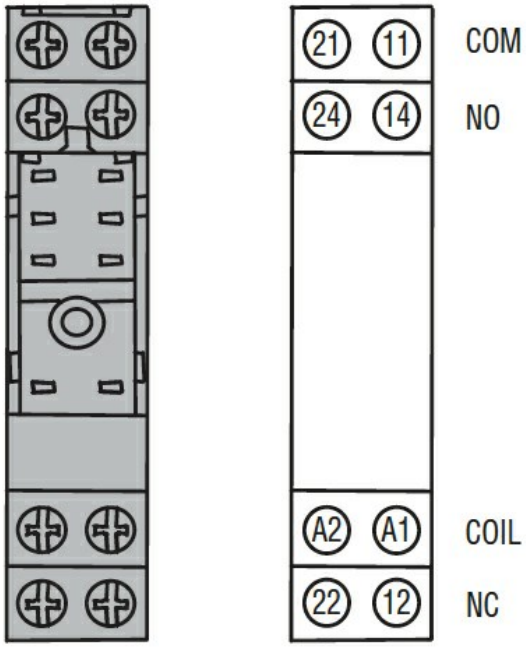

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cULus

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 - Relay socket

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding